


# Actuator

02-  
691.011

Distribution by  
Mouser

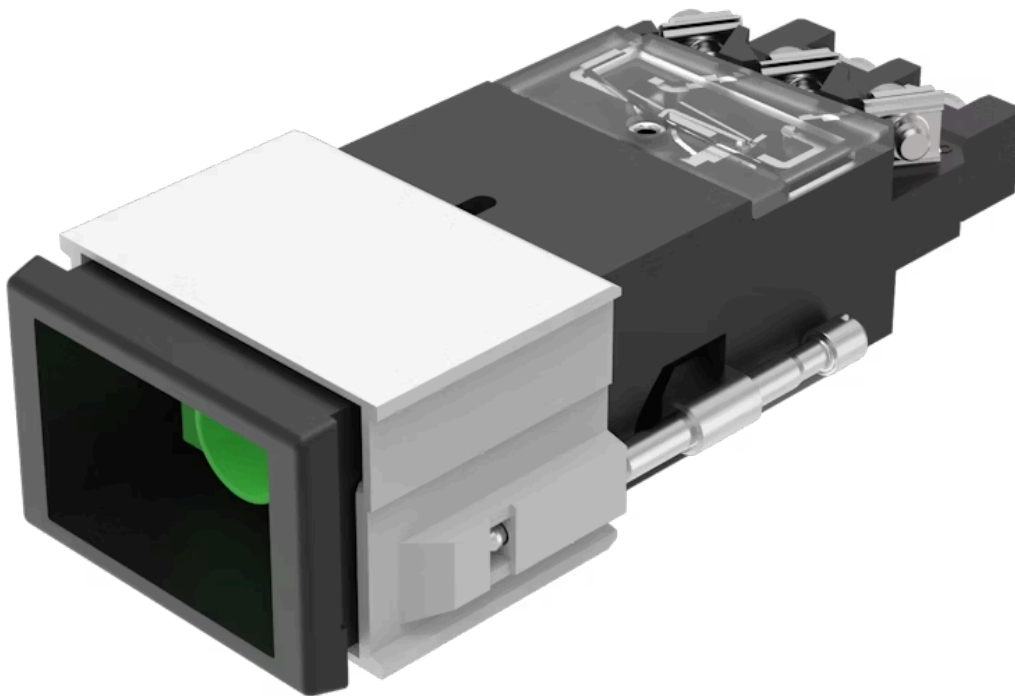

<https://mouser.eao.com/p/02-691.011>

Your product:

---



## 02-691.011 Actuator

### FRONT

Front form:	Rectangular
Front bezel colour:	Black
Front bezel material:	Plastic

### MOUNTING

Design:	Flush
Mounting cut-out:	21.2 mm x 29.2 mm
Mounting type:	Panel mounting

### ELECTRICAL CHARACTERISTICS

Switching voltage and switching current:	according to UL 250 VAC, 10 A according to IEC 60947-5-1 AC-12: 400 V, 10 A AC-15: 250 V, 8 A DC-13: 60 V, 1 A		AC-15: 400 V, 6 A DC-13: 110 V, 0.4 A DC-13: 24 V, 3 A
Contacts:	2 C		
Rated insulation voltage $U_i$ :	400 VAC/440 VDC according to IEC 60947-5-1		
Switching rating:	400 V @ 10 A		
Standards:	The switches comply with the "Standards for low-voltage switching devices" EN IEC 60947-5-1		
Thermal current $I_{th}$ :	10 A		

### MECHANICAL CHARACTERISTIC

Terminal:	Screw terminal
Contact material:	Silver

<b>Switching action:</b>	Rest (a) - Momentary
<b>Switching system:</b>	Snap-action switching element
<b>Switching system:</b>	1 or 2 self-cleaning snap action switching elements. 1 or 2 double-throw contacts.
<b>Switching positions:</b>	2 positions
<b>Switching angle:</b>	90° right
<b>Mechanical lifetime:</b>	2 Mil. cycles of operation
<b>Operating force:</b>	6 ... 12 N
<b>Tightening torque:</b>	Fixing nut max. 0.2 Nm, Screw terminal 0.8 Nm
<b>Terminal details 1:</b>	Max. wire cross-section 2 mm x 2.5 mm <sup>2</sup> Max. wire cross-section of stranded cable 2 x 1.5 mm <sup>2</sup>
<b>Weight:</b>	0.055 kg

## AMBIENT CONDITION


<b>IP Protection:</b>	IP40 front side, IP65 with spray cover, according to IEC 60529
<b>Operating temperature:</b>	– 25 °C ... + 55 °C, mounted as a block, make sure the heat can escape freely
<b>Storage temperature:</b>	– 30 °C ... + 85 °C
<b>Shock resistance:</b>	15 g for 11 ms, according to IEC 60068-2-27
<b>Vibration resistance:</b>	10 g at 10 Hz...2000 Hz, amplitude 1.0 mm, according to IEC 60068-2-6

## CERTIFICATE


<b>Approbations:</b>	CB (IEC 60947-5-1), CENELEC CCA-NTR (EN 60947-5-1), CSA, DNV, SEV, UL
<b>Conformities:</b>	CE, UKCA, 2011 / 65 / EC (RoHS), 2014 / 35 / EU (LVD)
<b>REACH:</b>	REACH compliant
<b>RoHS:</b>	RoHS compliant

## OTHER


<b>Short Description:</b>	Actuator, 21.2 mm x 29.2 mm, Rectangular, Black, Plastic, 2 C, Rest (a) - Momentary, Screw terminal
<b>Product attributes:</b>	A = lockable, non-actuated
<b>Switching positions:</b>	

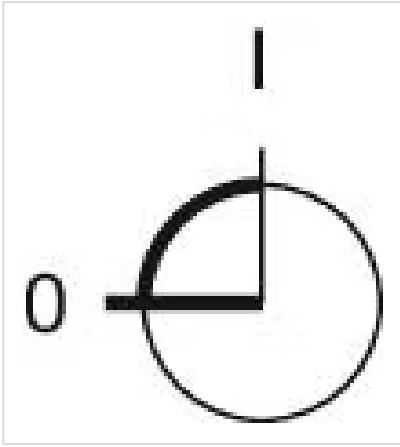

**Wiring diagrams:**

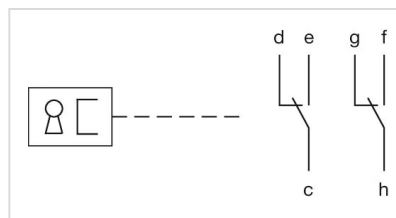

**Mounting cut-outs:**

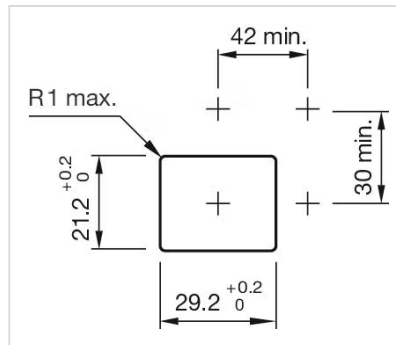

**Dimension drawings:**

