

# Actuator

03-  
810.001

Distribution by  
Mouser



<https://mouser.eao.com/p/03-810.001>

Your product:

---



## 03-810.001 Actuator

### PRODUCT RANGE

**Product Status:** Not Recommended for new design

### FRONT

**Front form:** Rectangular

### MOUNTING

**Design:** Flush

**Mounting cut-out:** 21.2 mm x 41.2 mm

**Mounting type:** Panel mounting

### ELECTRICAL CHARACTERISTICS

**Switching voltage and switching current:** 10 VAC ... 55 VAC, 25 mA  
10 VDC ... 75 VDC, 15 mA

**Operating voltage:** 10 - 55 V AC

### MECHANICAL CHARACTERISTICS

**Terminal:** Screw terminal

**Tightening torque:** Fixing sleeve max. 0.2 Nm, Screw terminal 0.8 Nm

**Weight:** 0.06 kg

### ACOUSTICAL CHARACTERISTICS

**Tone frequency:** ca. 2.8 kHz

## AMBIENT CONDITION


<b>IP Protection:</b>	IP40 front side, according to DIN EN 60529
<b>Operating temperature:</b>	- 20 °C ... + 60 °C
<b>Storage temperature:</b>	- 30 °C ... + 70 °C

## CERTIFICATE


<b>Conformities:</b>	CE, UKCA, 2011 / 65 / EC (RoHS), 2014 / 30 / EU (EMC)
<b>REACH:</b>	REACH compliant
<b>RoHS:</b>	RoHS compliant

## OTHER

<b>Short Description:</b>	Actuator, 21.2 mm x 41.2 mm, Rectangular, Screw terminal
<b>Buzzer system:</b>	Electronic non-contacting buzzer with IC oscillator
<b>Wiring diagrams:</b>	

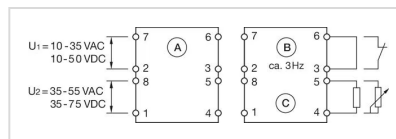

## Mounting cut-outs:

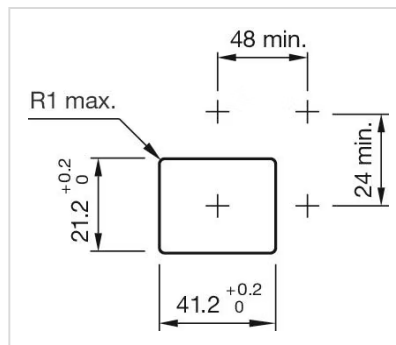

## Dimension drawings:

