


# Single- LED

10-  
2603.3176S

Distribution by  
Mouser

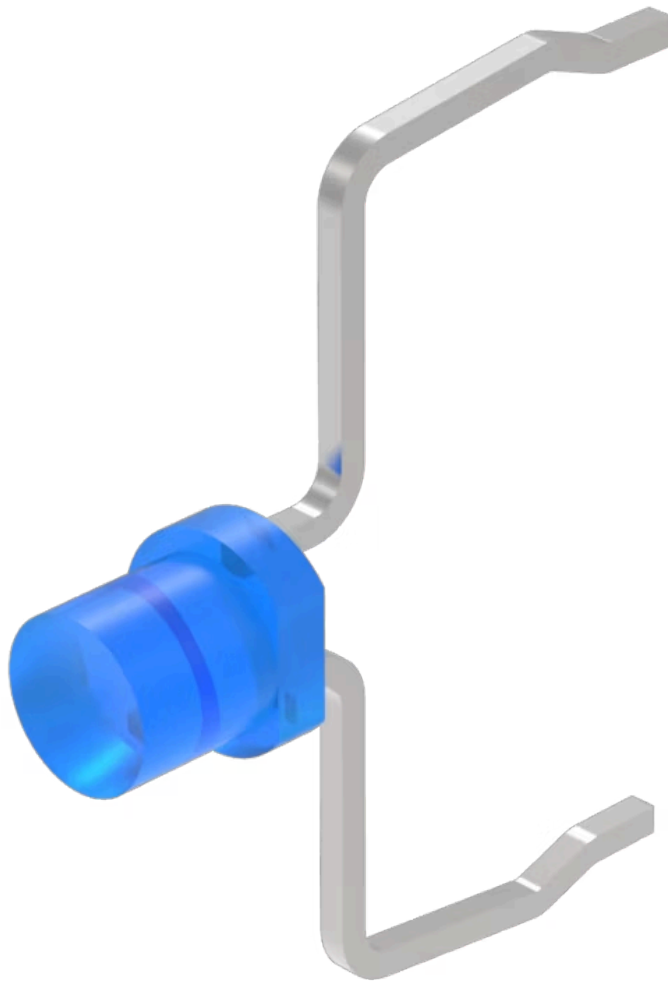

<https://mouser.eao.com/component/10-2603.3176...>

Your product:

---



## 10-2603.3176S Single-LED

*Loading ...*

### OPERATING-/INDICATION PART

**Illumination colour:** Blue

### ELECTRICAL CHARACTERISTICS

**Forward voltage:** 3.0 V DC @ 20 mA

**Operating voltage:** 2 - 6 V DC

**Lumi. Intensity:** 250 mcd

### MECHANICAL CHARACTERISTICS

**Weight:** 0 kg

### CERTIFICATE

**REACH:** REACH compliant

**RoHS:** RoHS compliant

### OTHER

**Short Description:** Single-LED, T1 Bi-Pin, Blue, 2 - 6 V DC

**Kind of illumination:** Single-LED

**Hints:** The customer has to decide what series resistor shall be used to the LED. Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination. The customer has to decide what resistor shall be used to the LED.

**Wiring diagrams:**



Component layouts:

