


# Single- LED

10-  
2603.3178K

Distribution by  
Mouser

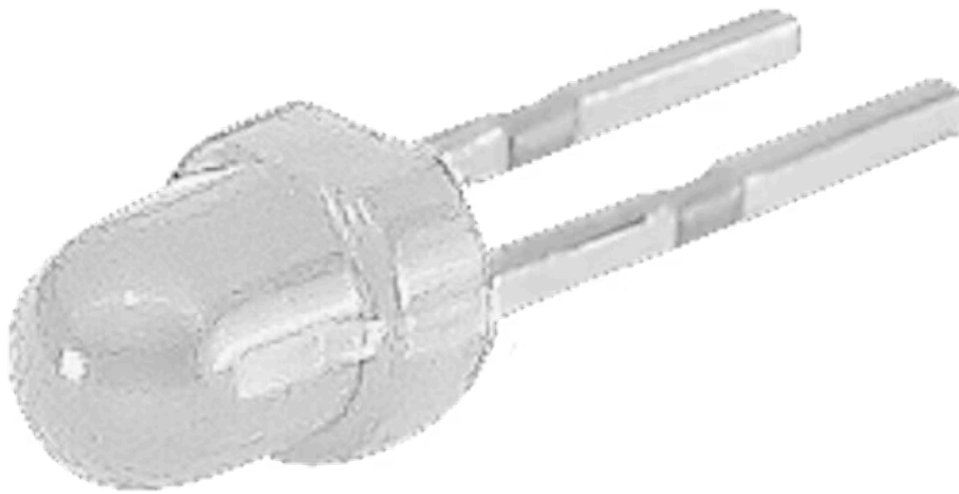

<https://mouser.eao.com/component/10-2603.3178...>

Your product:

---



## 10-2603.3178K Single-LED

*Loading ...*

### OPERATING-/INDICATION PART

**Illumination colour:** White

### ELECTRICAL CHARACTERISTICS

**Forward voltage:** 3.2 V DC @ 20 mA

**Operating voltage:** 3.2 V DC

**Operation current:** 20 mA

**Lumi. Intensity:** 4600 mcd

### MECHANICAL CHARACTERISTICS

**Weight:** 0.001 kg

### CERTIFICATE

**REACH:** REACH compliant

**RoHS:** RoHS compliant

### OTHER

**Short Description:** Single-LED, T1 Bi-Pin, White, 3.2 V DC

**Kind of illumination:** Single-LED

**Hints:** For LED element fitting information see Application guidelines, LED polarity Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination. The customer has to decide what resistor shall be used to the LED

**Pins:** Max. length: 8 mm

**Wiring diagrams:**

X+



y-