

e a o

Your Expert Partner for Human Machine Interfaces

Bi-colour LED

Distribution by
Mouser



10-2H12.314A



<https://mouser.eao.com/component/10-2H12.314A...>

Your product:



10-2H12.314A Bi-colour LED

OPERATING-/INDICATION PART

Illumination colour: Red / Green

ELECTRICAL CHARACTERISTICS

Operating voltage: 24 V DC +10%

Operation current: 15 mA ±15 %

Lumi. Intensity: 1200/900 mcd

MECHANICAL CHARACTERISTICS

Weight: 0.002 kg

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant

OTHER


Short Description: Bi-colour LED, BA9s, Red / Green, 24 V DC +10%

Kind of illumination: Bi-colour-LED


Product attributes: X2: + = Red / X1: + = Green

Hints: The max. overall length of the lamp may not exceed 25mm
Electrical and optical data are measured at 25 °C
The specified 6 V DC, 24 V DC Bi-colour; 130 V AC, 130 V DC and 230 V AC
versions are built with a protection diode
Luminosity and wave length variations caused by LED manufacturing processes
may cause slight differences regarding the illumination. The customer has to
decide what resistor shall be used to the LED

Wiring diagrams:

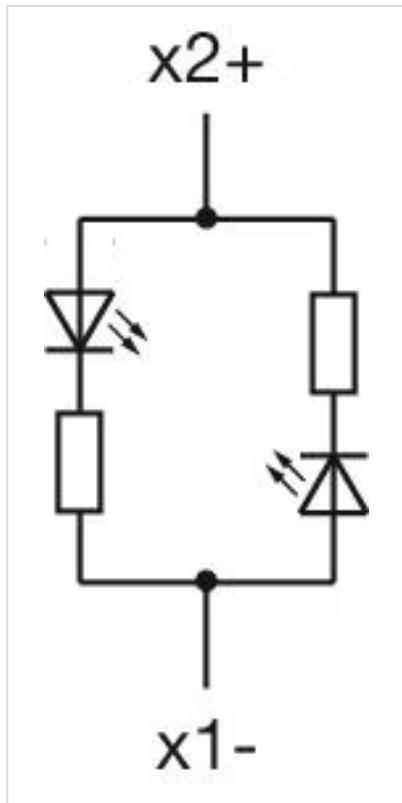

Dimension drawings:

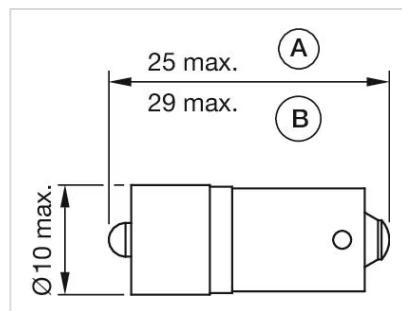

A = (standard)
B = (super bright)