

Single-LED

10-2H13.3165Q

Distribution by
Mouser



<https://mouser.eao.com/component/10-2H13.3165...>

Your product:



10-2H13.3165Q Single-LED

Loading ...

OPERATING-/INDICATION PART

Illumination colour: Green

ELECTRICAL CHARACTERISTICS

Forward voltage:

Operating voltage: 24 - 30 V DC +10%

Operation current: 12 - 18 mA \pm 15 %

Lumi. Intensity: 1800 - 2700 mcd

MECHANICAL CHARACTERISTICS

Weight: 0.002 kg

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant


OTHER

Short Description: Single-LED, BA9s, Green, 24 - 30 V DC +10%


Kind of illumination: Single-LED

Hints: Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination. The customer has to decide what resistor shall be used to the LED
Electrical and optical data are measured at 25 °C
The specified 12, 24, 28, 48 VAC/DC versions are built with a bridge rectifier

Wiring diagrams:

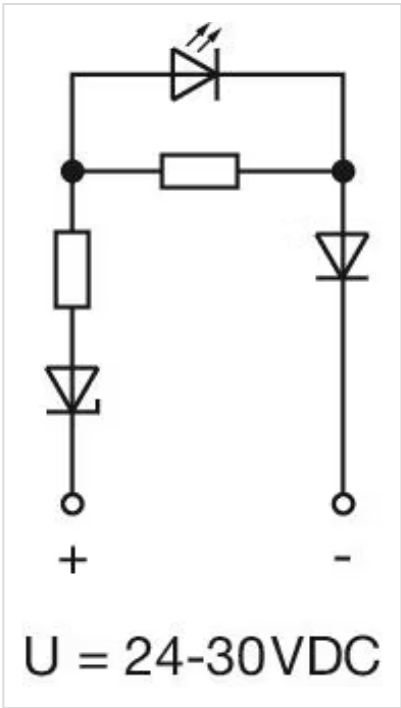

Dimension drawings:

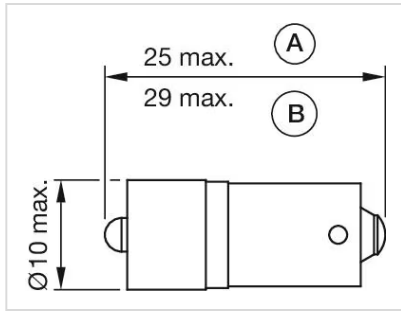

A = (standard)
B = (super bright)