

# Single-LED

10-2H25.2042

Distribution by  
Mouser



<https://mouser.eao.com/component/10-2H25.2042...>

Your product:

---



## 10-2H25.2042 Single-LED

*Loading . . .*

### OPERATING-/INDICATION PART

**Illumination colour:** Red

### ELECTRICAL CHARACTERISTICS

**Operating voltage:** 230 V AC +10%

**Operation current:** 3 mA  $\pm$ 15 %

**Lumi. Intensity:** 120 mcd

### MECHANICAL CHARACTERISTICS

**Weight:** 0.002 kg

### CERTIFICATE

**REACH:** REACH compliant

**RoHS:** RoHS compliant

### OTHER

**Short Description:** Single-LED, BA9s, Red, 230 V AC +10%


**Kind of illumination:** Single-LED

**Product attributes:** The max. overall length of the lamp may not exceed 25mm

**Hints:** The specified 6 V DC, 24 V DC Bi-colour; 130 V AC, 130 V DC and 230 V AC versions are built with a protection diode  
The specified 130 VAC types are developed to run on a supply voltage of 130 VAC only  
An operation at a higher supply voltage using commercial lampholders with integrated resistors, is not approved  
If the 24VDC Bi-colour lamp is driven with normal polarity (plus on middle contact of the lamp) the first mentioned colour will light up, with inverted polarity the second colour will light up

The luminous intensity stated is for when used with DC  
Electrical and optical data are measured at 25 °C  
Luminosity and wave length variations caused by LED manufacturing processes  
may cause slight differences regarding the illumination. The customer has to  
decide what resistor shall be used to the LED

**Wiring diagrams:**

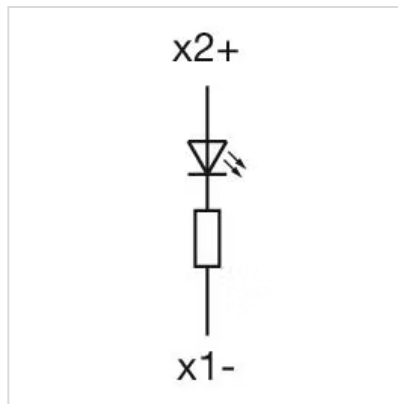

**Dimension drawings:**



A = (standard)  
B = (super bright)