


# Single-LED

10-2K12.1079

Distribution by  
Mouser

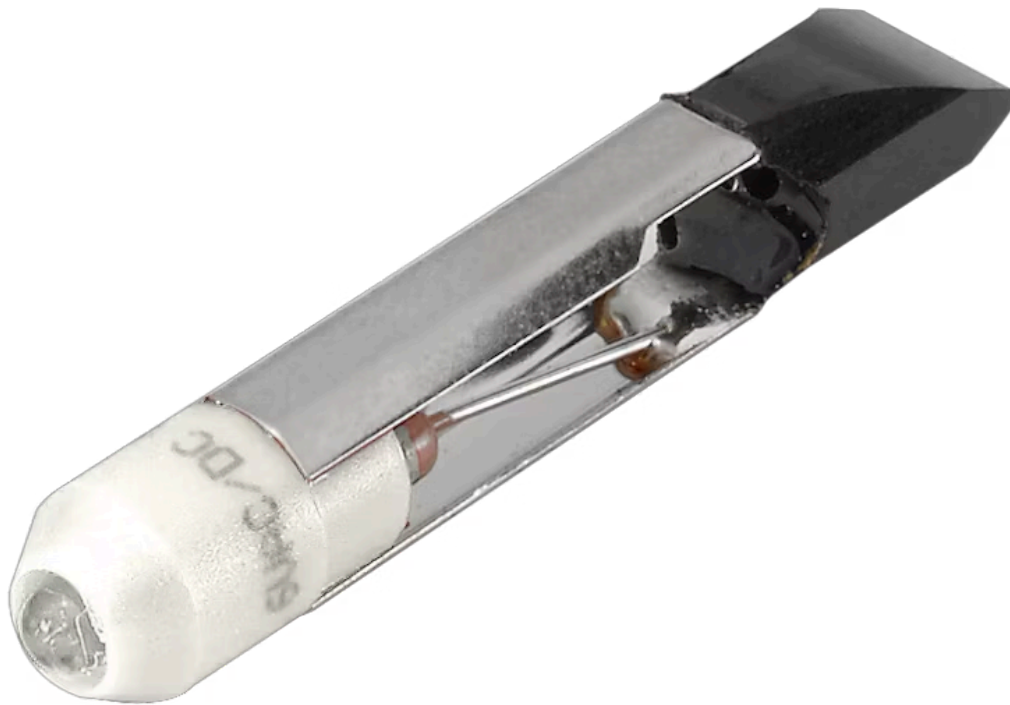

<https://mouser.eao.com/component/10-2K12.1079...>

Your product:

---



## 10-2K12.1079 Single-LED

*Loading ...*

### OPERATING-/INDICATION PART

**Illumination colour:** White

### ELECTRICAL CHARACTERISTICS

**Forward voltage:**

**Operating voltage:** 24 V AC/DC +10%

**Operation current:** 3 - 6 mA  $\pm$ 15 %

**Lumi. Intensity:** 900 mcd

### MECHANICAL CHARACTERISTICS

**Weight:** 0.002 kg

### CERTIFICATE

**REACH:** REACH compliant

**RoHS:** RoHS compliant

### OTHER

**Short Description:** Single-LED, T6.8, White, 24 V AC/DC +10%


**Kind of illumination:** Single-LED

**Product attributes:** When using AC/DC types with AC operation, slight flickering can occur

**Hints:** When using AC/DC types with AC operation, slight flickering can occur

**Wiring diagrams:**

x2+

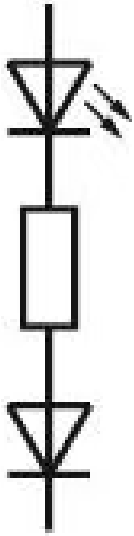

x1-

Dimension drawings:

