

# Actuator

18-  
061.0052L

Distribution by  
Mouser



<https://mouser.eao.com/component/18-061.0052L...>

Your product:

---



## 18-061.0052L Actuator

### PRODUCT RANGE

**Product Status:** Phase-out

### FRONT

**Front dimension:** Ø 19 mm

**Front form:** Round

**Front bezel colour:** Black

**Front bezel material:** Plastic

### MOUNTING

**Design:** Flush

**Mounting type:** Panel mounting

### OPERATING-/INDICATION PART

**Lens colour:** Red

**Lens material:** Plastic

**Lens illumination:** Illuminated

**Lens shape:** Flush

**Lens optics:** translucent

**Illumination colour:** Red

### ELECTRICAL CHARACTERISTICS

**Operating voltage:** 12 V DC ±10 %

## MECHANICAL CHARACTERISTICS

<b>Terminal:</b>	Soldering terminal
<b>Weight:</b>	0.002 kg

## AMBIENT CONDITION

<b>Operating temperature:</b>	- 25 °C ... + 65 °C
-------------------------------	---------------------

## CERTIFICATE

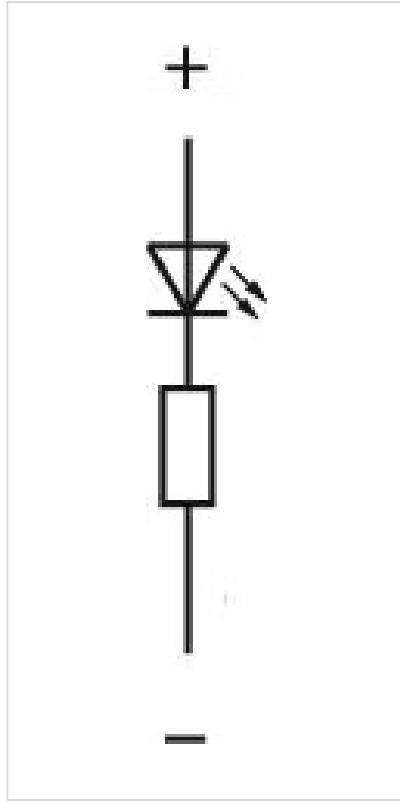
<b>REACH:</b>	REACH compliant
<b>RoHS:</b>	RoHS compliant

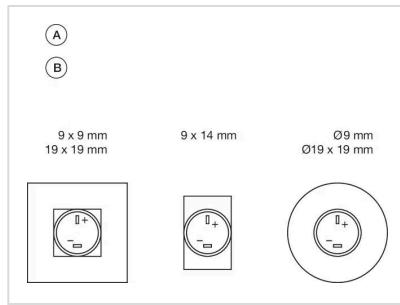
## OTHER

<b>Short Description:</b>	Actuator, Ø 19 mm, Flush, Illuminated, Red, Plastic, translucent, Round, Black, Plastic, Soldering terminal, Red
---------------------------	--

<b>Dimension:</b>	Ø 13.8 mm
-------------------	-----------

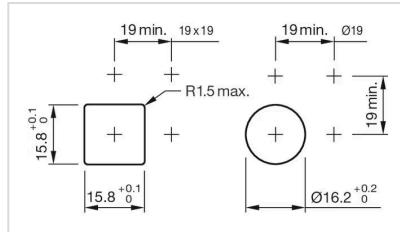
<b>Product attributes:</b>	Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination. The customer has to decide what resistor shall be used to the LED
----------------------------	--

<b>Wiring diagrams:</b>	
-------------------------	--

**Component layouts:**

A = Terminals (rear side)

B = Indicator

**Mounting cut-outs:****Dimension drawings:**