

Actuator

18-

062.0054L

Distribution by Mouser









18-062.0054L Actuator

Loading . . .

| F | R | 0 | N | т |
|---|---|---|---|---|
| | | v | | |

Front dimension:Ø 19 mmFront form:RoundFront bezel colour:BlackFront bezel material:Plastic

MOUNTING

Design: Flush

Mounting type: Panel mounting

OPERATING-/INDICATION PART

Lens colour: Yellow
Lens material: Plastic

Lens illumination: Illuminated

Lens shape: Flush

Lens optics: translucent

Illumination colour: Yellow

ELECTRICAL CHARACTERISTICS

Operating voltage: 24 V DC $\pm 10\%$

Switching rating:

MECHANICAL CHARATERISTIC

Terminal: Soldering terminal

Weight: 0.003 kg

AMBIENT CONDITION

Operating temperature: $-25 \, ^{\circ}\text{C} \, ... \, + \, 65 \, ^{\circ}\text{C}$

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant

OTHER

Short Description: Actuator, Ø 19 mm, Flush, Illuminated, Yellow, Plastic, translucent, Round, Black,

Plastic, Soldering terminal, Yellow


Dimension: Ø 13.8 mm

Product attributes: Luminosity and wave length variations caused by LED manufacturing processes


may cause slight differences regarding the illumination. The customer has to

decide what resistor shall be used to the LED

Wiring diagrams:

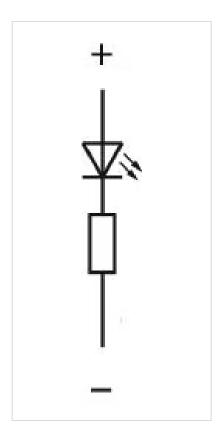


Component layouts:



A = Terminals (rear side) B = Indicator

Mounting cut-outs:



Dimension drawings:

