

# Actuator

18-  
082.0054L

Distribution by  
Mouser



<https://mouser.eao.com/component/18-082.0054L...>

Your product:

---



## 18-082.0054L Actuator

### PRODUCT RANGE

**Product Status:** Phase-out

### FRONT

**Front dimension:** 19 mm x 19 mm  
**Front form:** Square  
**Front bezel colour:** Black  
**Front bezel material:** Plastic

### MOUNTING

**Design:** Flush  
**Mounting type:** Panel mounting

### OPERATING-/INDICATION PART

**Lens colour:** Yellow  
**Lens material:** Plastic  
**Lens illumination:** Illuminated  
**Lens shape:** Flush  
**Lens optics:** translucent  
**Illumination colour:** Yellow

### ELECTRICAL CHARACTERISTICS

**Operating voltage:** 24 V DC ±10 %

## MECHANICAL CHARACTERISTICS

<b>Terminal:</b>	Soldering terminal
<b>Weight:</b>	0.003 kg

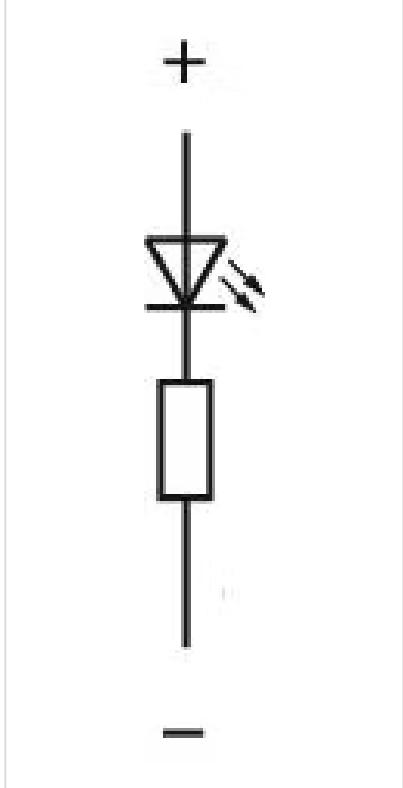
## AMBIENT CONDITION

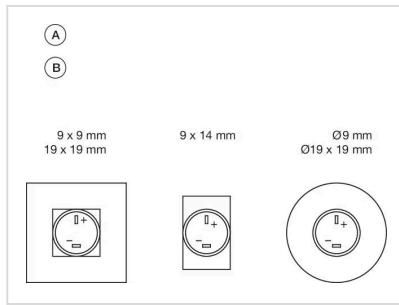
<b>Operating temperature:</b>	- 25 °C ... + 65 °C
-------------------------------	---------------------

## CERTIFICATE

<b>REACH:</b>	REACH compliant
<b>RoHS:</b>	RoHS compliant

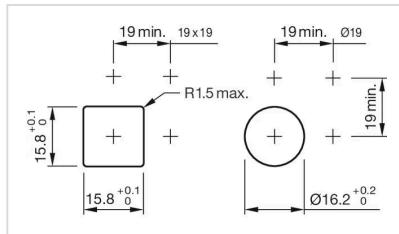
## OTHER

<b>Short Description:</b>	Actuator, 19 mm x 19 mm, Flush, Illuminated, Yellow, Plastic, translucent, Square, Black, Plastic, Soldering terminal, Yellow
<b>Dimension:</b>	13.8 mm x 13.8 mm
<b>Product attributes:</b>	Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination. The customer has to decide what resistor shall be used to the LED
<b>Wiring diagrams:</b>	

**Component layouts:**

A = Terminals (rear side)

B = Indicator

**Mounting cut-outs:****Dimension drawings:**