

Actuator

22-
211.011

Distribution by
Mouser



<https://mouser.eao.com/component/22-211.011/e...>

Your product:



22-211.011 Actuator

Loading ...

FRONT

| | |
|------------------------------|---------------|
| Front dimension: | 36 mm x 24 mm |
| Front form: | Rectangular |
| Front bezel colour: | Black |
| Front bezel material: | Plastic |

MOUNTING

| | |
|--------------------------|----------------|
| Design: | Flush |
| Mounting cut-out: | 22 mm x 30 mm |
| Mounting type: | Panel mounting |

OPERATING-/INDICATION PART

| | |
|---------------------------|----------------------|
| Lens illumination: | Optional illuminated |
|---------------------------|----------------------|

ELECTRICAL CHARACTERISTICS

| | |
|---|---|
| Switching voltage and switching current: | 400 VAC, 10 A (ohmic) 400 VAC, 4 A (inductive, $\cos(\phi) = 0.7$) 250 VAC, 5 A (inductive, $\cos(\phi) = 0.7$) 125 VAC, 8 A (inductive, $\cos(\phi) = 0.7$) 110 VDC, 0.4 A (inductive, L:R = 30 ms) 60 VDC, 1.5 A (inductive, L:R = 30 ms) 24 VDC, 6 A (inductive, L:R = 30 ms) |
|---|---|

| | |
|---|--|
| Contacts: | 1 NO |
| Rated insulation voltage U_i: | 400 VAC/440 VDC according to IEC 60947-5-1 |
| Switching rating: | 400 V @ 10 A |
| Electrical lifetime: | 50 000 cycles of operation |
| Electric strength: | |

2000 VAC, 50 Hz, 1 minute, as per IEC 60512-2-11 between all terminals and earth

Standards: The switches comply with the "Standards for low-voltage switching devices" EN IEC 60947-5-1

Thermal current I_{th}: 10 A

MECHANICAL CHARACTERISTICS

Terminal: Screw terminal

Contact material: Silver

Switching action: Momentary

Switching system: Snap-action switching element

Switching system: Self-cleaning, double-break snap action switching system (contact opening width 2 mm x 1.5 mm).
Max. 2 normally closed or 2 normally open contacts, or one of each

Mechanical lifetime: 1 Mil. cycles of operation

Operating force: 4.4 N ±1 N (1 switching element), 7.8 N ±1 N (2 switching element)

Operating Travel: 5.5 mm ± 0.5 mm

Travel: > 3 mm

Tightening torque: Fixing nut max. 0.2 Nm, Screw terminal 0.8 Nm

Terminal details 1: Max. wire cross-section 2 mm x 2.5 mm²
Max. wire cross-section of stranded cable 2 x 1.5 mm²

Weight: 0.04 kg

AMBIENT CONDITION

IP Protection: IP20 rear side, IP65 front side, according to IEC 60529

Operating temperature: - 25 °C ... + 55 °C

Storage temperature: - 40 °C ... + 95 °C

Shock resistance: 50 g for 11 ms, according to IEC 60512-4-3

Vibration resistance: 10 g at 10 Hz...2000 Hz, amplitude 0.75 mm (Sinusoidal), according to DIN EN 60512-4-4

CERTIFICATE

Approbations: CB (IEC 61058-1), CSA, EAC, ENEC (EN 61058-1), UL

Conformities: CE, UKCA, 2011 / 65 / EC (RoHS), 2014 / 35 / EU (LVD)

REACH: REACH compliant

RoHS:

RoHS compliant

OTHER

Short Description:

Actuator, 22 mm x 30 mm, 36 mm x 24 mm, Optional illuminated, Rectangular, Black, Plastic, 1 NO, Momentary, Screw terminal


Housing colour:

Black


Housing material:

Plastic


Wiring diagrams:

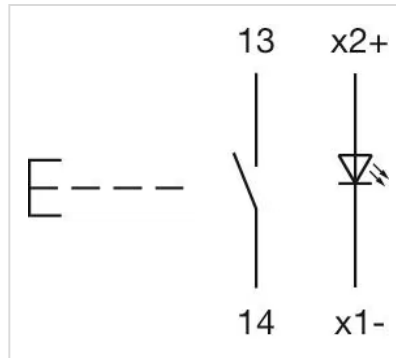


Mounting cut-outs:

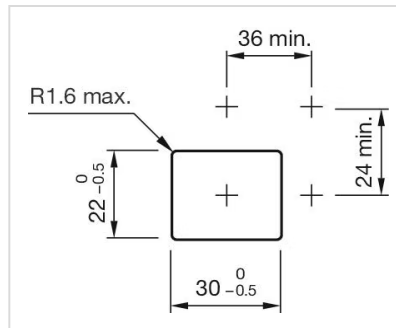

Dimension drawings:

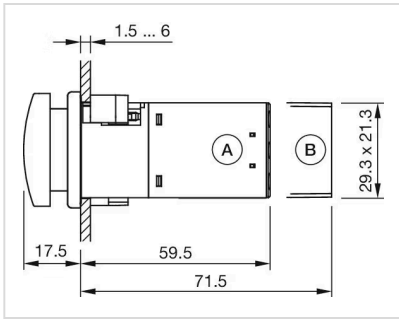

A = Screw terminal
 B = Plug-in terminal 6.3 mm x 0.8 mm

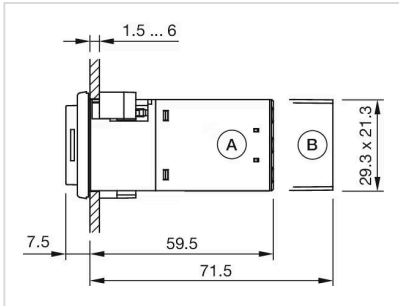

A = Screw terminal
 B = Plug-in terminal 6.3 mm x 0.8 mm