

Actuator

45-
2234.4FE0.000

Distribution by
Mouser



<https://mouser.eao.com/p/45-2234.4FE0.000>

Your product:



45-2234.4FE0.000 Actuator

FRONT

| | |
|-----------------------|-----------|
| Front dimension: | Ø 38 mm |
| Front form: | Round |
| Front bezel colour: | Sand grey |
| Front bezel material: | Metal |

MOUNTING

| | |
|-------------------|----------------|
| Design: | Flush |
| Mounting cut-out: | Ø 30.5 mm |
| Mounting type: | Panel mounting |

OPERATING-/INDICATION PART

| | |
|----------------------|-------------|
| Lens colour: | Red |
| Lens material: | Plastic |
| Lens illumination: | Illuminated |
| Lens shape: | Flush |
| Lens optics: | transparent |
| Illumination colour: | Red |

MECHANICAL CHARACTERISTICS

| | |
|----------------------|-----------------------------|
| Switching action: | Maintained |
| Switching system: | Slow-make switching element |
| Mechanical lifetime: | 500 000 cycles of operation |

Operating frequency: Max. 1 800/h

Weight: 0.072 kg

AMBIENT CONDITION

IP front protection: IP66, IP67, IP69K

Operating temperature: – 25 °C ... + 70 °C

Storage temperature: – 40 °C ... + 80 °C

Shock resistance: According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms

Vibration resistance: According to IEC 60068-2-6: 20 ... 500 Hz: 5 g

Climate resistance: During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant

OTHER


Short Description: Actuator, Ø 30.5 mm, Ø 38 mm, Flush, Illuminated, Red, Plastic, transparent, Round, Sand grey, Metal, Maintained, IP66, IP67, IP69K, Red

Housing colour: Silver

Housing material: Metal

Hints: Push to unlatch

Wiring diagrams:

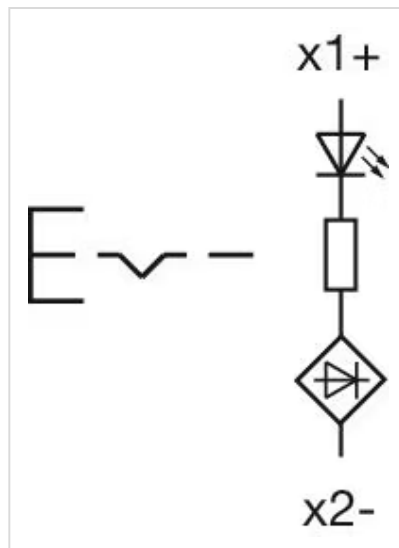

Dimension drawings:

