

# Actuator

45-

2631.29N0.000

Distribution by  
Mouser<https://mouser.eao.com/component/45-2631.29N0...>

Your product:

---



## 45-2631.29N0.000 Actuator

### FRONT

**Front dimension:** Ø 40 mm

**Front form:** Round

**Front bezel colour:** Silver

**Front bezel material:** Metal

### MOUNTING

**Design:** Raised

**Mounting cut-out:** Ø 22.3 mm

**Mounting type:** Panel mounting

### OPERATING-/INDICATION PART

**Lens colour:** White

**Lens material:** Plastic

**Lens illumination:** Illuminated

**Lens shape:** Mushroom-head

**Lens optics:** transparent

### MECHANICAL CHARACTERISTICS

**Switching action:** Momentary

**Switching system:** Slow-make switching element

**Mechanical lifetime:** 10 Mil. cycles of operation

**Operating frequency:** Max. 3 600/h

**Weight:** 0.08 kg

### AMBIENT CONDITION


<b>IP front protection:</b>	IP66, IP67, IP69K
<b>Operating temperature:</b>	– 25 °C ... + 70 °C
<b>Storage temperature:</b>	– 40 °C ... + 80 °C
<b>Shock resistance:</b>	According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms
<b>Vibration resistance:</b>	According to IEC 60068-2-6: 20 ... 500 Hz: 5 g
<b>Climate resistance:</b>	During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

### CERTIFICATE


<b>REACH:</b>	REACH compliant
<b>RoHS:</b>	RoHS compliant

### OTHER

<b>Short Description:</b>	Actuator, Ø 22.3 mm, Ø 40 mm, Mushroom-head, Illuminated, White, Plastic, transparent, Round, Silver, Metal, Momentary, IP66, IP67, IP69K
<b>Housing colour:</b>	Silver
<b>Housing material:</b>	Metal
<b>Wiring diagrams:</b>	

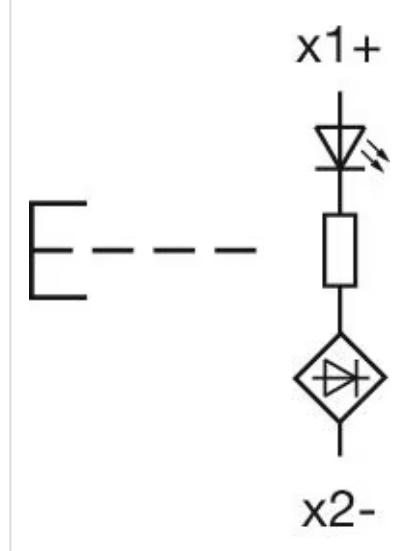

**Mounting cut-outs:**

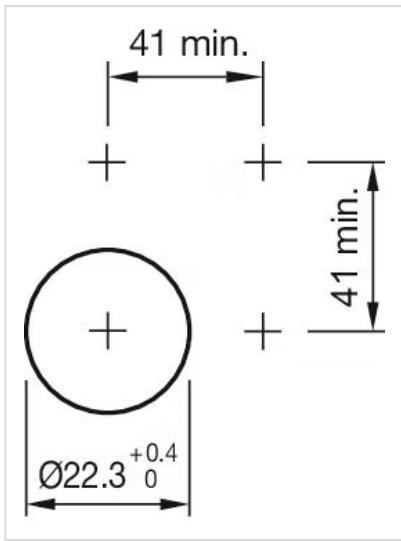

Dimension drawings:

