

# Actuator

45-

2631.2AH0.000

Distribution by  
Mouser<https://mouser.eao.com/component/45-2631.2AH0...>

Your product:

---



45-2631.2AH0.000  
Actuator

#### FRONT

**Front dimension:** Ø 60 mm

**Front form:** Round

**Front bezel colour:** Silver

**Front bezel material:** Metal

#### MOUNTING

**Design:** Raised

**Mounting cut-out:** Ø 22.3 mm

**Mounting type:** Panel mounting

#### OPERATING-/INDICATION PART

**Lens colour:** Green

**Lens material:** Plastic

**Lens illumination:** Illuminated

**Lens shape:** Mushroom-head

**Lens optics:** transparent

#### MECHANICAL CHARACTERISTICS

**Switching action:** Momentary

**Switching system:** Slow-make switching element

**Mechanical lifetime:** 10 Mil. cycles of operation

**Operating frequency:** Max. 3 600/h

**Weight:** 0.055 kg

### AMBIENT CONDITION

**IP front protection:** IP66, IP67, IP69K

**Operating temperature:** - 25 °C ... + 70 °C

**Storage temperature:** - 40 °C ... + 80 °C

**Shock resistance:** According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms

**Vibration resistance:** According to IEC 60068-2-6: 20 ... 500 Hz: 5 g

**Climate resistance:** During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

### CERTIFICATE

**REACH:** REACH compliant

**RoHS:** RoHS compliant


### OTHER

**Short Description:** Actuator, Ø 22.3 mm, Ø 60 mm, Mushroom-head, Illuminated, Green, Plastic, transparent, Round, Silver, Metal, Momentary, IP66, IP67, IP69K


**Housing colour:** Silver

**Housing material:** Metal

**Wiring diagrams:**

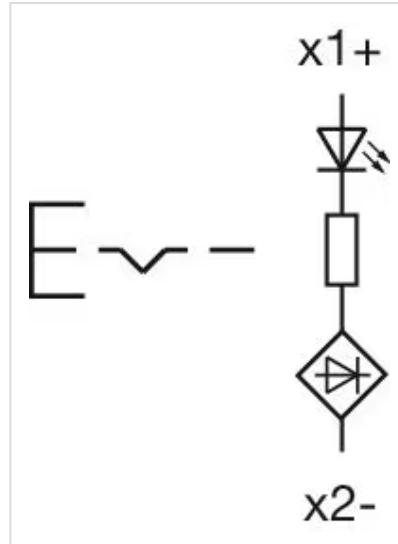

**Mounting cut-outs:**

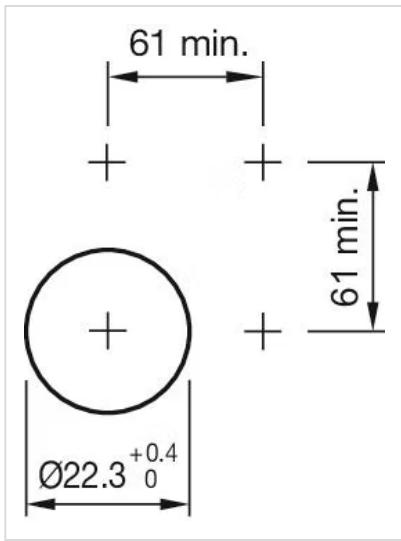

Dimension drawings:

