

Actuator

45-

2736.1960.000

Distribution by
Mouser



<https://mouser.eao.com/p/45-2736.1960.000>

Your product:



45-2736.1960.000 Actuator

FRONT

Front dimension:	Ø 40 mm
Front form:	Round
Front bezel colour:	Black
Front bezel material:	Plastic

MOUNTING

Design:	Raised
Mounting cut-out:	Ø 22.3 mm
Mounting type:	Panel mounting

OPERATING-/INDICATION PART

Lens colour:	Blue
Lens material:	Plastic
Lens illumination:	Non illuminated
Lens shape:	Mushroom-head
Lens optics:	opaque

ELECTRICAL CHARACTERISTICS

Switching rating:

MECHANICAL CHARACTERISTIC

Switching action: Maintained

Release type:	Twist to unlock
Mechanical lifetime:	300 000 cycles of operation
Operating frequency:	Max. 600/h
Weight:	0.046 kg

AMBIENT CONDITION


IP front protection:	IP66, IP67, IP69K
Operating temperature:	– 25 °C ... + 70 °C
Storage temperature:	– 40 °C ... + 80 °C
Shock resistance:	According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms
Vibration resistance:	According to IEC 60068-2-6: 20 ... 500 Hz: 5 g
Climate resistance:	During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

CERTIFICATE

REACH:	REACH compliant
RoHS:	RoHS compliant
Standards:	IEC EN 60204-1

OTHER

Short Description:	Actuator, Ø 22.3 mm, Ø 40 mm, Mushroom-head, Non illuminated, Blue, Plastic, opaque, Round, Black, Plastic, Maintained, IP66, IP67, IP69K, Twist to unlock
Dimension:	Ø 40 mm
Housing material:	Plastic
Product attributes:	Twist to unlock clockwise
Hints:	Application as per DIN EN ISO 13850 and EN 60204-1
Wiring diagrams:	

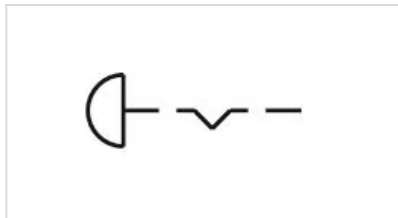

Mounting cut-outs:



Dimension drawings:

