

# Actuator

45-  
2845.1E90.002

Distribution by  
Mouser



<https://mouser.eao.com/component/45-2845.1E90...>

Your product:

---



## 45-2845.1E90.002 Actuator

*Loading ...*

### FRONT

<b>Front dimension:</b>	Ø 29,5 mm
<b>Front form:</b>	Round
<b>Front bezel colour:</b>	Black
<b>Front bezel material:</b>	Plastic

### MOUNTING

<b>Design:</b>	Raised
<b>Mounting cut-out:</b>	Ø 22.3 mm
<b>Mounting type:</b>	Panel mounting

### OPERATING-/INDICATION PART

<b>Lever colour:</b>	White
<b>Lever material:</b>	plastic
<b>Lever shape:</b>	round

### MECHANICAL CHARACTERISTICS

<b>Switching action:</b>	Maintained - Maintained - Maintained - Maintained
<b>Switching positions:</b>	4 positions
<b>Mechanical lifetime:</b>	1 Mil. cycles of operation
<b>Operating frequency:</b>	1 800/h
<b>Weight:</b>	0.001 kg

**AMBIENT CONDITION**


- IP front protection:** IP66, IP67, IP69K
- Operating temperature:** - 25 °C ... + 70 °C
- Storage temperature:** - 40 °C ... + 80 °C
- Shock resistance:** According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms
- Vibration resistance:** According to IEC 60068-2-6: 10 ... 500 Hz: 5 g
- Climate resistance:** During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

**CERTIFICATE**

- REACH:** REACH compliant
- RoHS:** RoHS compliant

**OTHER**


- Short Description:** Actuator, Ø 22.3 mm, Ø 29,5 mm, optional illuminative, White, round, Round, Black, Plastic, Maintained - Maintained - Maintained - Maintained, IP66, IP67, IP69K
- Housing material:** Plastic
- Switching positions:**

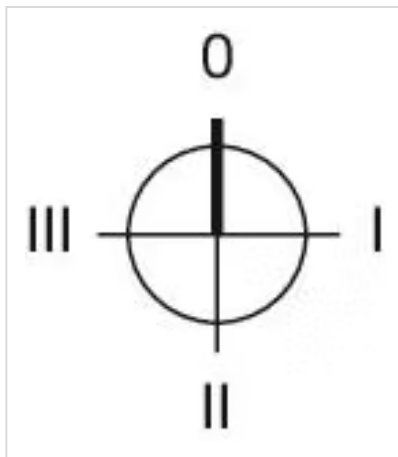

**Wiring diagrams:**



**Mounting cut-outs:**

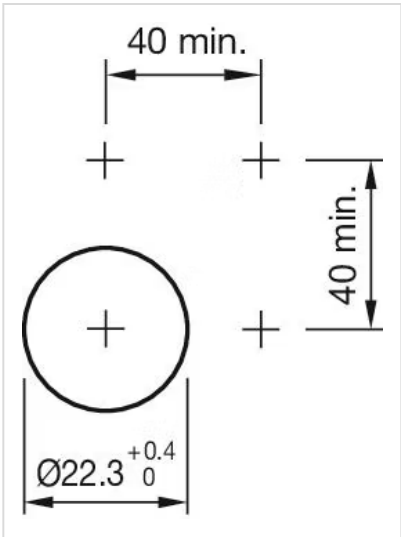

Dimension drawings:

