

# Actuator

45-

290G.2000.113

Distribution by  
Mouser<https://mouser.eao.com/component/45-290G.2000...>

Your product:

---



## 45-290G.2000.113 Actuator

### FRONT

**Front dimension:** Ø 29,5 mm

**Front form:** Round

**Front bezel colour:** Silver

**Front bezel material:** Metal

### MOUNTING

**Design:** Raised

**Mounting cut-out:** Ø 22.3 mm

**Mounting type:** Panel mounting

### MECHANICAL CHARACTERISTICS

**Switching action:** Maintained (a) - Rest (a) - Maintained

**Switching positions:** 3 positions

**Switching angle:** 45° left / 45° right / -45° ... +45°

**Mechanical lifetime:** 1 Mil. cycles of operation (RCC/RPB)

**Operating frequency:** 1 800/h

**Weight:** 0.052 kg

### AMBIENT CONDITION

**IP front protection:** IP66, IP67, IP69K

**Operating temperature:** - 25 °C ... + 70 °C

**Storage temperature:** - 40 °C ... + 80 °C


<b>Shock resistance:</b>	According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms
<b>Vibration resistance:</b>	According to IEC 60068-2-6: 10 ... 500 Hz: 5 g
<b>Climate resistance:</b>	During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

## CERTIFICATE

<b>REACH:</b>	REACH compliant
<b>RoHS:</b>	RoHS compliant

## OTHER


<b>Short Description:</b>	Actuator, Ø 22.3 mm, Ø 29,5 mm, Round, Silver, Metal, Maintained (a) - Rest (a) - Maintained, IP66, IP67, IP69K
<b>Housing material:</b>	Metal
<b>Hints:</b>	The standard lock: RONIS, T254
<b>Switching positions:</b>	

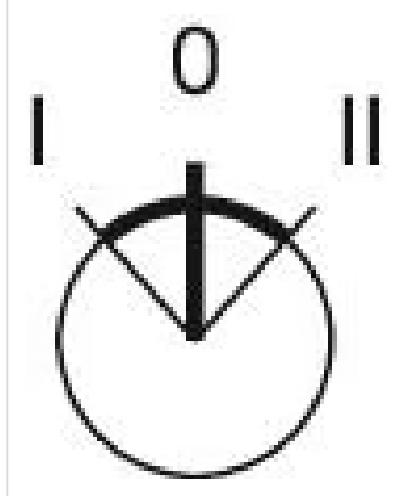

## Wiring diagrams:



## Mounting cut-outs:

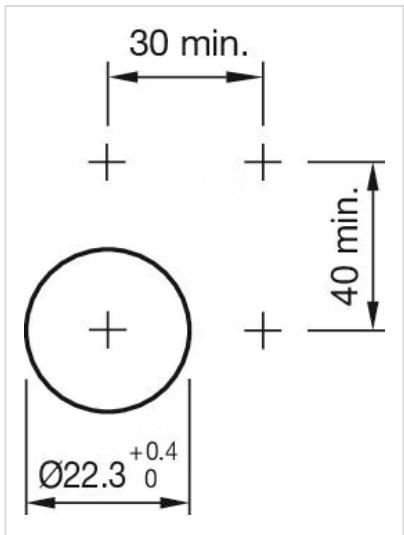

Dimension drawings:

