

Actuator

45-
2D36.2A20.000

Distribution by
Mouser



<https://mouser.eao.com/component/45-2D36.2A20...>

Your product:



45-2D36.2A20.000 Actuator

Loading ...

FRONT

| | |
|------------------------------|---------|
| Front dimension: | Ø 60 mm |
| Front form: | Round |
| Front bezel colour: | Silver |
| Front bezel material: | Metal |

MOUNTING

| | |
|-----------------------|----------------|
| Mounting type: | Panel mounting |
|-----------------------|----------------|

OPERATING-/INDICATION PART

| | |
|---------------------------|---------------|
| Lens colour: | Red |
| Lens material: | Plastic |
| Lens illumination: | Illuminated |
| Lens shape: | Mushroom-head |
| Lens optics: | opaque |

MECHANICAL CHARACTERISTICS

| | |
|-----------------------------|-----------------------------|
| Switching action: | Maintained |
| Release type: | Twist to unlock |
| Mechanical lifetime: | 300 000 cycles of operation |
| Operating frequency: | Max. 600/h |
| Weight: | 0.105 kg |

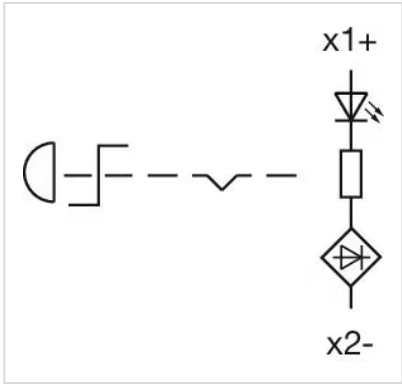
AMBIENT CONDITION

| | |
|-------------------------------|--|
| Operating temperature: | - 25 °C ... + 70 °C |
| Storage temperature: | - 40 °C ... + 80 °C |
| Shock resistance: | According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms |
| Vibration resistance: | According to IEC 60068-2-6: 2 ... 500 Hz: 5 g |
| Climate resistance: | During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6 |

CERTIFICATE

| | |
|---------------|-----------------|
| REACH: | REACH compliant |
| RoHS: | RoHS compliant |

OTHER

| | |
|----------------------------|--|
| Short Description: | Actuator, Ø 60 mm, Mushroom-head, Illuminated, Red, Plastic, opaque, Round, Silver, Metal, Maintained, Twist to unlock |
| Dimension: | Ø 60 mm |
| Housing colour: | Silver |
| Housing material: | Metal |
| Product attributes: | Twist to unlock clockwise |
| Hints: | Application as per DIN EN ISO 13850 and EN 60204-1 |
| Wiring diagrams: |  |

Mounting cut-outs:



Dimension drawings:

