

# Actuator

45-  
2F0T.1010.000

Distribution by  
Mouser



<https://mouser.eao.com/component/45-2F0T.1010...>

Your product:

---



## 45-2F0T.1010.000 Actuator

*Loading ...*

### FRONT

<b>Front dimension:</b>	Ø 29,5 mm
<b>Front form:</b>	Round
<b>Front bezel colour:</b>	Black
<b>Front bezel material:</b>	Plastic

### MOUNTING

<b>Design:</b>	Raised
<b>Mounting cut-out:</b>	Ø 22.3 mm
<b>Mounting type:</b>	Panel mounting

### OPERATING-/INDICATION PART

<b>Lever colour:</b>	Black
<b>Lever material:</b>	plastic

### MECHANICAL CHARACTERISTICS

<b>Switching action:</b>	Momentary
<b>Mechanical lifetime:</b>	250 000 cycles of operation per direction of actuation
<b>Operating frequency:</b>	1 800/h
<b>Weight:</b>	0.03 kg

### AMBIENT CONDITION

<b>IP front protection:</b>	IP65, IP67
-----------------------------	------------

**Operating temperature:** - 25 °C ... + 70 °C

**Storage temperature:** - 40 °C ... + 80 °C

**Shock resistance:** According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms

**Vibration resistance:** According to IEC 60068-2-6: 10 ... 500 Hz: 5 g

**Climate resistance:** During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6, 3B2

### CERTIFICATE

**REACH:** REACH compliant

**RoHS:** RoHS compliant

### OTHER


**Short Description:** Actuator, Ø 22.3 mm, Ø 29,5 mm, Black, Round, Black, Plastic, Momentary, IP65, IP67

**Housing material:** Plastic


**Product attributes:** 2 positions (L-R)

**Hints:** Lockable only in center position

**Wiring diagrams:**

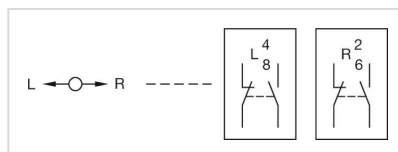

**Mounting cut-outs:**

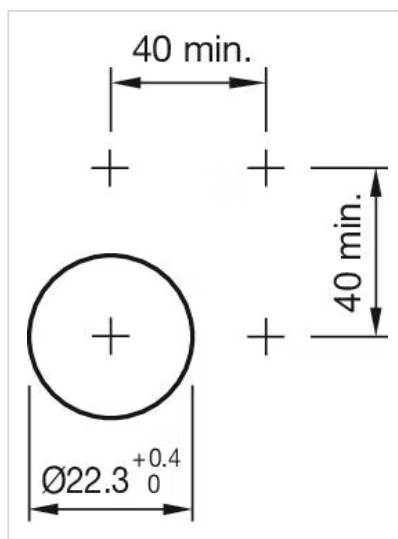

**Dimension drawings:**

