

Actuator

45-
2T00.10G0.000

Distribution by
Mouser



<https://mouser.eao.com/p/45-2T00.10G0.000>

Your product:



45-2T00.10G0.000 Actuator

FRONT

Front dimension: Ø 30 mm

Front form: Round

MOUNTING

Design: Raised

Mounting cut-out: Ø 22.3 mm

Mounting type: Panel mounting

OPERATING-/INDICATION PART

Lens cap colour: Yellow

Lens cap material: Plastic

Lens cap shape: flush

Lens cap optical effect: transparent

Illumination colour: Yellow

ELECTRICAL CHARACTERISTICS

Switching rating:

MECHANICAL CHARACTERISTIC

Weight: 0.012 kg

AMBIENT CONDITION


| | |
|-------------------------------|--|
| IP front protection: | IP66, IP67, IP69K |
| Operating temperature: | – 25 °C ... + 70 °C |
| Storage temperature: | – 40 °C ... + 80 °C |
| Shock resistance: | According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms |
| Vibration resistance: | According to IEC 60068-2-6: 2 ... 500 Hz: 5 g |
| Climate resistance: | During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6 |

CERTIFICATE

| | |
|---------------|-----------------|
| REACH: | REACH compliant |
| RoHS: | RoHS compliant |

OTHER

| | |
|---------------------------|--|
| Short Description: | Actuator, Ø 22.3 mm, Ø 30 mm, Round, IP66, IP67, IP69K, Yellow |
| Housing material: | Plastic |
| Wiring diagrams: | |

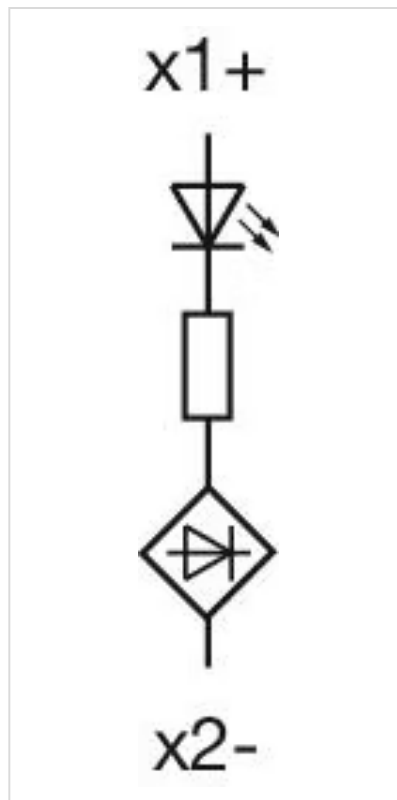

Mounting cut-outs:



Dimension drawings:

