

Actuator

45-
2T00.10K0.000

Distribution by
Mouser



<https://mouser.eao.com/p/45-2T00.10K0.000>

Your product:



45-2T00.10K0.000 Actuator

FRONT

Front dimension: Ø 30 mm

Front form: Round

MOUNTING

Design: Raised

Mounting cut-out: Ø 22.3 mm

Mounting type: Panel mounting

OPERATING-/INDICATION PART

Lens cap colour: Colourless

Lens cap material: Plastic

Lens cap shape: flush

Lens cap optical effect: transparent

Illumination colour: Colourless

ELECTRICAL CHARACTERISTICS

Switching rating:

MECHANICAL CHARACTERISTIC

Weight: 0.012 kg

AMBIENT CONDITION


IP front protection:	IP66, IP67, IP69K
Operating temperature:	– 25 °C ... + 70 °C
Storage temperature:	– 40 °C ... + 80 °C
Shock resistance:	According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms
Vibration resistance:	According to IEC 60068-2-6: 2 ... 500 Hz: 5 g
Climate resistance:	During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

CERTIFICATE

REACH:	REACH compliant
RoHS:	RoHS compliant

OTHER

Short Description:	Actuator, Ø 22.3 mm, Ø 30 mm, Round, IP66, IP67, IP69K, Colourless
Housing material:	Plastic
Wiring diagrams:	

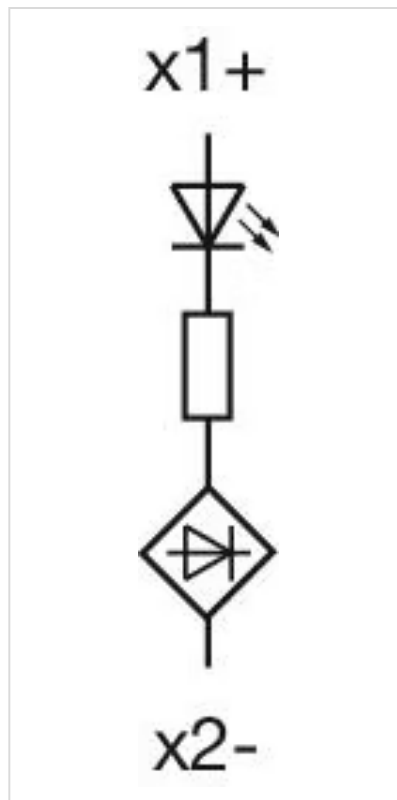

Mounting cut-outs:



Dimension drawings:

