

# Actuator

45-  
2T07.10E0.000

Distribution by  
Mouser



<https://mouser.eao.com/component/45-2T07.10E0...>

Your product:

---



## 45-2T07.10E0.000 Actuator

*Loading ...*

### FRONT

|                              |           |
|------------------------------|-----------|
| <b>Front dimension:</b>      | Ø 29,5 mm |
| <b>Front form:</b>           | Round     |
| <b>Front bezel colour:</b>   | Black     |
| <b>Front bezel material:</b> | Plastic   |

### MOUNTING

|                          |                |
|--------------------------|----------------|
| <b>Design:</b>           | Raised         |
| <b>Mounting cut-out:</b> | Ø 22.3 mm      |
| <b>Mounting type:</b>    | Panel mounting |

### OPERATING-/INDICATION PART

|                             |                        |
|-----------------------------|------------------------|
| <b>Lens colour:</b>         | Red                    |
| <b>Lens material:</b>       | Plastic                |
| <b>Lens shape:</b>          | Flush                  |
| <b>Lens optics:</b>         | transparent            |
| <b>Lens type:</b>           | Level with front bezel |
| <b>Lens cap colour:</b>     | Red                    |
| <b>Illumination colour:</b> | Red                    |

### MECHANICAL CHARACTERISTICS

|                |          |
|----------------|----------|
| <b>Weight:</b> | 0.016 kg |
|----------------|----------|

## AMBIENT CONDITION


|                               |  |
|-------------------------------|--|
| <b>IP front protection:</b>   | IP66, IP67, IP69K  |
| <b>Operating temperature:</b> | - 25 °C ... + 70 °C  |
| <b>Storage temperature:</b>   | - 40 °C ... + 80 °C  |
| <b>Shock resistance:</b>      | According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms |
| <b>Vibration resistance:</b>  | According to IEC 60068-2-6: 2 ... 500 Hz: 5 g                  |
| <b>Climate resistance:</b>    | During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6    |

## CERTIFICATE

|               |                 |
|---------------|-----------------|
| <b>REACH:</b> | REACH compliant |
| <b>RoHS:</b>  | RoHS compliant  |

## OTHER

|                           |   |
|---------------------------|---|
| <b>Short Description:</b> | Actuator, Ø 22.3 mm, Ø 29,5 mm, Flush, Red, Plastic, transparent, Round, Black, Plastic, IP66, IP67, IP69K, Red |
| <b>Housing material:</b>  | Plastic   |
| <b>Wiring diagrams:</b>   |   |

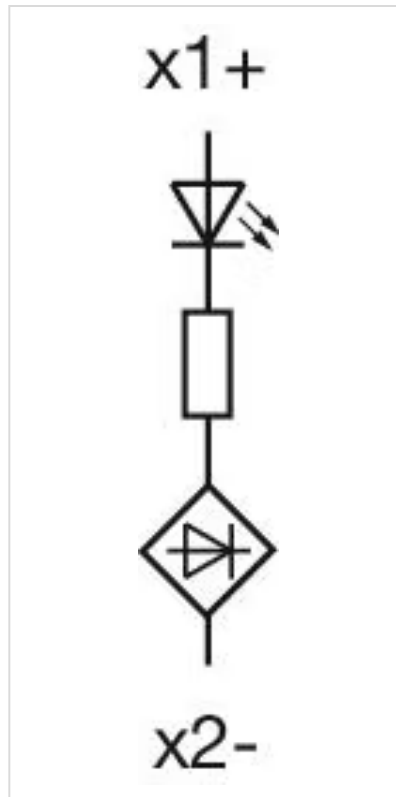

**Mounting cut-outs:**



Dimension drawings:

