


Illumination element

Distribution by Mouser



45-320.1F42

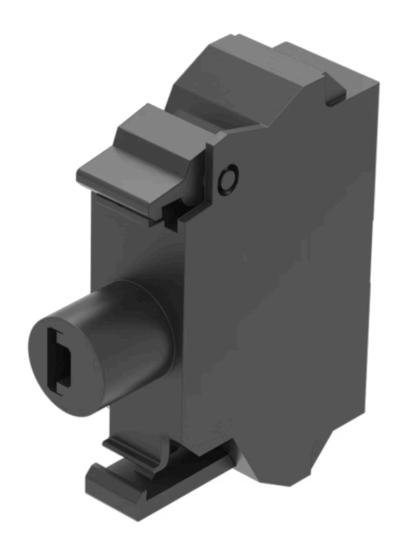





45-320.1F42 Illumination element

M	0	Ш	M.	TI	N	G

Component mounting type: Front mounting

OPERATING-/INDICATION PART

Illumination colour: Amber

ELECTRICAL CHARACTERISTICS

Operating voltage: 24 - 240 V AC/DC

Surge voltage resistance: 4 kV

Lumi. Intensity: 450 - 1120 mcd

MECHANICAL CHARATERISTIC

Terminal: Spring-type terminal

Terminal details 1: Solid $2 \times (0.25 \dots 1.5 \text{mm}^2)$

Finely stranded

- Without end sleeves 2 x (0.5 \dots 1.5 mm²) - With end sleeves 2 x (0.5 \dots 0.75 mm²)

- For AWG cables for auxiliary contacts 2 x (24 ... 16)

Weight: 0.01 kg

CERTIFICATE

REACH: REACH compliant


RoHS: RoHS compliant

OTHER

Short Description:

Illumination element, Spring-type terminal, Amber, 24 - 240 V AC/DC, Front mounting

Wiring diagrams:

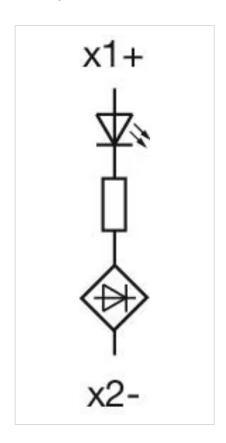

Dimension drawings:

