

# Illumination element

Distribution by  
Mouser



45-320.1G11



<https://mouser.eao.com/component/45-320.1G11...>

Your product:

---



## 45-320.1G11 Illumination element

### MOUNTING

**Component mounting type:** Front mounting

### OPERATING-/INDICATION PART

**Illumination colour:** Yellow

### ELECTRICAL CHARACTERISTICS

**Operating voltage:** 6 - 24 V AC/DC

**Surge voltage resistance:** 4 kV

**Lumi. Intensity:** 900 - 1400 mcd

### MECHANICAL CHARACTERISTICS

**Terminal:** Screw terminal

**Terminal details 1:**  
Solid 2 x (1.0 ... 1.5mm<sup>2</sup>)  
– With end sleeves 2 x (0.5 ... 0.75 mm<sup>2</sup>)

**Terminal details 2:**  
Finely stranded  
– Without end sleeves 2 x (0.5 ... 0.75 mm<sup>2</sup>)  
– Without end sleeves 2 x (0.5 ... 1.5 mm<sup>2</sup>)  
– For AWG cables for auxiliary contacts 2 x (18 ... 14)

**Weight:** 0.008 kg

### CERTIFICATE

**REACH:** REACH compliant


**RoHS:** RoHS compliant

## OTHER

### Short Description:

Illumination element, Screw terminal, Yellow, 6 - 24 V AC/DC, Front mounting

### Wiring diagrams:

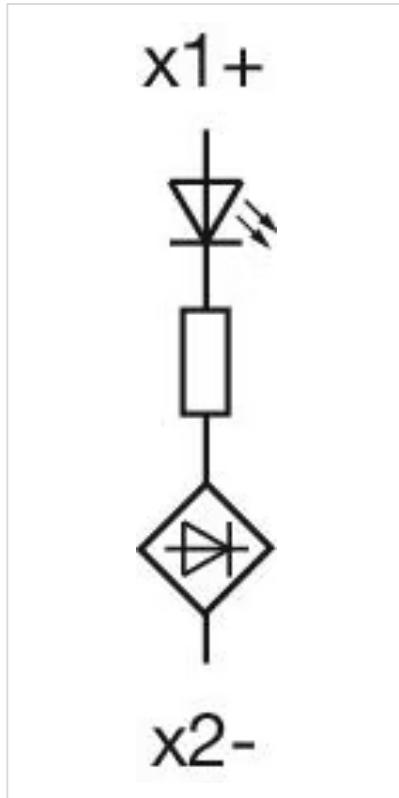

### Dimension drawings:

