


# Illumination element

Distribution by Mouser



45-320.1H46

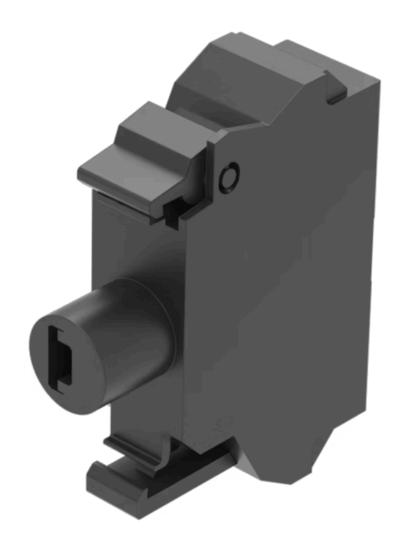





## 45-320.1H46 Illumination element

М	0	Ш	M.	П	N	G
IVI	v	u	IV.		14	v

Component mounting type: Front mounting

#### **OPERATING-/INDICATION PART**

Illumination colour: Green

#### **ELECTRICAL CHARACTERISTICS**

**Operating voltage:** 24 V AC/DC

Surge voltage resistance: 4 kV

**Lumi. Intensity:** 900 - 1400 mcd

#### **MECHANICAL CHARACTERISTICS**

**Terminal:** Spring-type terminal

Terminal details 1: Solid 2 x (0.25 ... 1.5mm²)

Finely stranded

- Without end sleeves 2 x (0.5  $\dots$  1.5 mm<sup>2</sup>) - With end sleeves 2 x (0.5  $\dots$  0.75 mm<sup>2</sup>)

- For AWG cables for auxiliary contacts 2 x (24 ... 16)

**Weight:** 0.009 kg


#### CERTIFICATE

**REACH:** REACH compliant

RoHS: RoHS compliant

**OTHER** 

### Wiring diagrams:

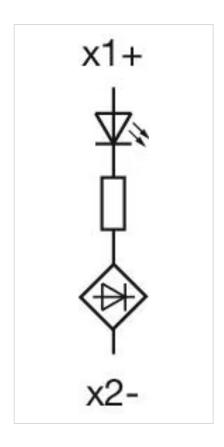

#### Dimension drawings:

