


# Illumination element

Distribution by Mouser



45-320.1J11

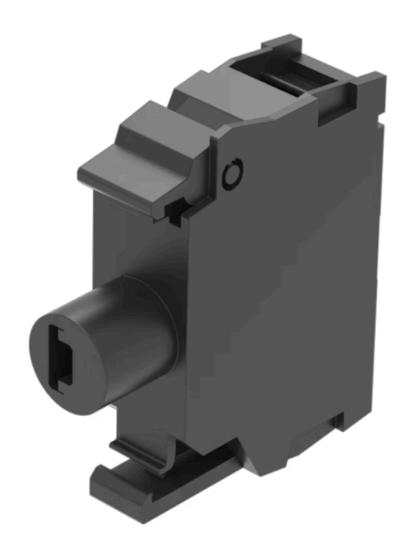





# 45-320.1J11 Illumination element

P	R	O	D	u	C	ГΙ	R	Δ	N	G	F

Product Status: Phase-out

**MOUNTING** 

Component mounting type: Front mounting

**OPERATING-/INDICATION PART** 

Illumination colour: Blue

# **ELECTRICAL CHARACTERISTICS**

**Operating voltage:** 6 - 24 V AC/DC

Surge voltage resistance: 4 kV

**Lumi. Intensity:** 280 - 710 mcd

#### **MECHANICAL CHARATERISTIC**

**Terminal:** Screw terminal

Terminal details 1: Solid 2 x (1.0 ... 1.5mm²)

- With end sleeves 2 x (0.5 ... 0.75 mm<sup>2</sup>)

**Terminal details 2:** Finely stranded

Without end sleeves 2 x (0.5 ... 0.75 mm²)Without end sleeves 2 x (0.5 ... 1.5 mm²)

- For AWG cables for auxiliary contacts 2 x (18 ... 14)

**Weight:** 0.008 kg

**CERTIFICATE** 

**REACH:** REACH compliant


**RoHS:** RoHS compliant

## **OTHER**

**Short Description:** 

Illumination element, Screw terminal, Blue, 6 - 24 V AC/DC, Front mounting

Wiring diagrams:

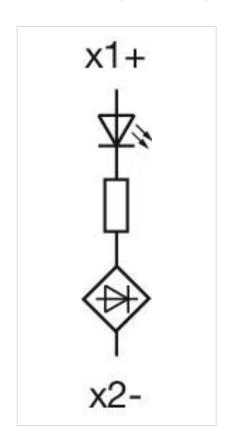

## **Dimension drawings:**

