


Your Expert Partner for Human Machine Interfaces

# Illumination element

Distribution by Mouser



45-320.1J12

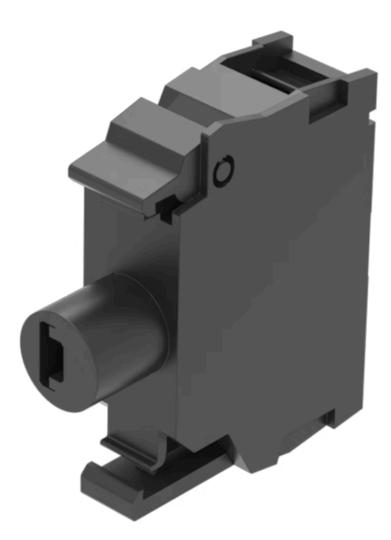



https://mouser.eao.com/p/45-320.1J12

### Your product:



## 45-320.1J12 Illumination element

MOUNTING	
Component mounting type:	Front mounting
<b>OPERATING-/INDICATION PART</b>	
Illumination colour:	Blue
ELECTRICAL CHARACTERISTICS	
Operating voltage:	24 - 240 V AC/DC
Surge voltage resistance:	4 kV
Lumi. Intensity:	280 - 710 mcd

#### MECHANICAL CHARACTERISTICS

Screw terminal
Solid 2 x (1.0 1.5mm <sup>2</sup> ) - With end sleeves 2 x (0.5 0.75 mm <sup>2</sup> )
Finely stranded – Without end sleeves 2 x (0.5 0.75 mm <sup>2</sup> ) – Without end sleeves 2 x (0.5 1.5 mm <sup>2</sup> ) – For AWG cables for auxiliary contacts 2 x (18 14)
0.011 kg

#### CERTIFICATE


REACH:	REACH compliant
RoHS:	RoHS compliant

#### OTHER

Short Description:

Wiring diagrams:

Illumination element, Screw terminal, Blue, 24 - 240 V AC/DC, Front mounting

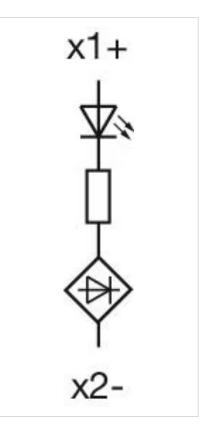

#### Dimension drawings:

