

Your Expert Partner for Human Machine Interfaces

Illumination element

Distribution by Mouser



45-320.1J16





https://mouser.eao.com/p/45-320.1J16

Your product:



45-320.1J16 Illumination element

MOUNTING	
Component mounting type:	Front mounting
OPERATING-/INDICATION PART	
Illumination colour:	Blue
ELECTRICAL CHARACTERISTICS	
Operating voltage:	24 V AC/DC
Surge voltage resistance:	4 kV
Lumi. Intensity:	280 - 710 mcd

MECHANICAL CHARATERISTIC

Terminal:	Screw terminal
Terminal details 1:	Solid 2 x (1.0 1.5mm²) - With end sleeves 2 x (0.5 0.75 mm²)
Terminal details 2:	Finely stranded – Without end sleeves 2 x (0.5 0.75 mm ²) – Without end sleeves 2 x (0.5 1.5 mm ²) – For AWG cables for auxiliary contacts 2 x (18 14)
Weight:	0.01 kg

CERTIFICATE


REACH:	REACH compliant
RoHS:	RoHS compliant

OTHER

Short Description:

Wiring diagrams:

Illumination element, Screw terminal, Blue, 24 V AC/DC, Front mounting

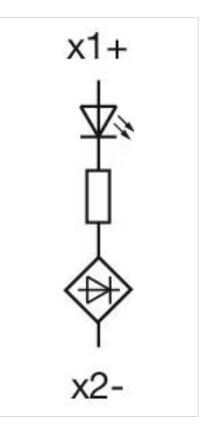

Dimension drawings:

