

# Illumination element

Distribution by Mouser



45-320.1N42







## 45-320.1N42 Illumination element

M	0	Ш	N٦	ш	N	Ġ

Component mounting type: Front mounting

#### **OPERATING-/INDICATION PART**

Illumination colour: White

#### **ELECTRICAL CHARACTERISTICS**

**Operating voltage:** 24 - 240 V AC/DC

Surge voltage resistance: 4 kV

**Lumi. Intensity:** 900 - 1400 mcd

#### **MECHANICAL CHARATERISTIC**

**Terminal:** Spring-type terminal

Terminal details 1: Solid 2 x (0.25 ... 1.5mm²)

Finely stranded

- Without end sleeves 2 x (0.5  $\dots$  1.5 mm<sup>2</sup>) - With end sleeves 2 x (0.5  $\dots$  0.75 mm<sup>2</sup>)

- For AWG cables for auxiliary contacts 2 x (24 ... 16)

Weight: 0.01 kg

#### CERTIFICATE

**REACH:** REACH compliant


RoHS: RoHS compliant

**OTHER** 

**Short Description:** 

Illumination element, Spring-type terminal, White, 24 - 240 V AC/DC, Front mounting

Wiring diagrams:

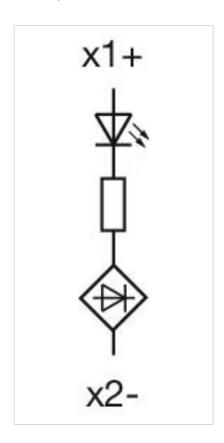

### Dimension drawings:

