

Your Expert Partner for Human Machine Interfaces

# Illumination element

45-320.2E11









https://mouser.eao.com/p/45-320.2E11

### Your product:



## 45-320.2E11 Illumination element

MOUNTING	Μ	0	U	Ν	τI	IN	G	
----------	---	---	---	---	----	----	---	--

Component mounting type:	Base mounting		
<b>OPERATING-/INDICATION PART</b>			
Illumination colour:	Red		
ELECTRICAL CHARACTERISTICS			
Operating voltage:	6 - 24 V AC/DC		
Surge voltage resistance:	4 kV		
Lumi. Intensity:	450 - 1120 mcd		

#### MECHANICAL CHARATERISTIC

Terminal:	Screw terminal
Terminal details 1:	Solid 2 x (1.0 1.5mm²) - With end sleeves 2 x (0.5 0.75 mm²)
Terminal details 2:	Finely stranded - Without end sleeves 2 x (0.5 0.75 mm <sup>2</sup> ) - Without end sleeves 2 x (0.5 1.5 mm <sup>2</sup> ) - For AWG cables for auxiliary contacts 2 x (18 14)
Weight:	0.02 kg

#### CERTIFICATE

REACH:	REACH compliant
RoHS:	RoHS compliant

#### OTHER


Short Description:

Hints:

Wiring diagrams:

Illumination element, Screw terminal, Red, 6 - 24 V AC/DC, Base mounting

Illumination element base mounting can used only with enclosure

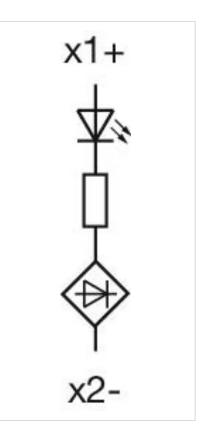

**Dimension drawings:** 

