

Illumination element

Distribution by
Mouser



45-320.2H12



[https://mouser.eao.com/component/45-320.2H12/...](https://mouser.eao.com/component/45-320.2H12/)

Your product:



45-320.2H12

Illumination element

MOUNTING

Component mounting type: Base mounting

OPERATING-/INDICATION PART

Illumination colour: Green

ELECTRICAL CHARACTERISTICS

Operating voltage: 24 - 240 V AC/DC

Surge voltage resistance: 4 kV

Lumi. Intensity: 900 - 1400 mcd

MECHANICAL CHARACTERISTICS

Terminal: Screw terminal

Terminal details 1:
Solid 2 x (1.0 ... 1.5mm²)
– With end sleeves 2 x (0.5 ... 0.75 mm²)

Terminal details 2:
Finely stranded
– Without end sleeves 2 x (0.5 ... 0.75 mm²)
– Without end sleeves 2 x (0.5 ... 1.5 mm²)
– For AWG cables for auxiliary contacts 2 x (18 ... 14)

Weight: 0.02 kg

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant

OTHER


Short Description:

Illumination element, Screw terminal, Green, 24 - 240 V AC/DC, Base mounting

Hints:

Illumination element base mounting can be used only with enclosure

Wiring diagrams:

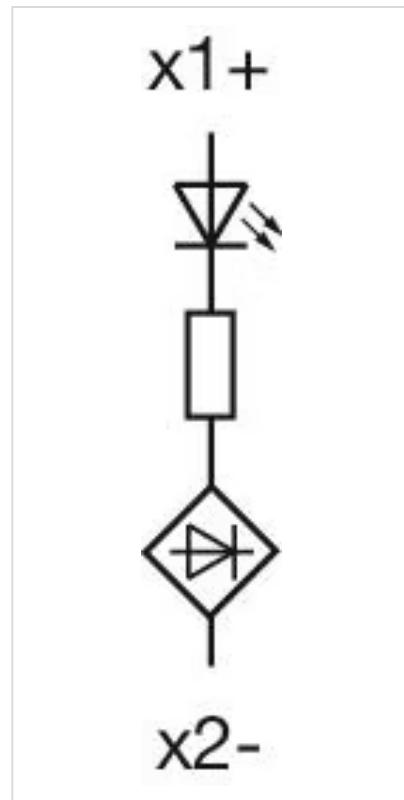

Dimension drawings:

