

Illumination element

Distribution by Mouser



45-320.2J16







45-320.2J16 Illumination element

B A		ш	NIT.	CIR	٧G
IVI	U	u	N I	ш	чu

Component mounting type: Base mounting

OPERATING-/INDICATION PART

Illumination colour: Blue

ELECTRICAL CHARACTERISTICS

Operating voltage: 24 V AC/DC

Surge voltage resistance: 4 kV

Lumi. Intensity: 280 - 710 mcd

MECHANICAL CHARATERISTIC

Terminal: Screw terminal

Terminal details 1: Solid 2 x (1.0 ... 1.5mm²)

- With end sleeves 2 x (0.5 ... 0.75 mm²)

Terminal details 2: Finely stranded

Without end sleeves 2 x (0.5 ... 0.75 mm²)Without end sleeves 2 x (0.5 ... 1.5 mm²)

- For AWG cables for auxiliary contacts 2 x (18 ... 14)

Weight: 0.02 kg

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant

OTHER


Short Description:

Illumination element, Screw terminal, Blue, 24 V AC/DC, Base mounting

Hints:

Illumination element base mounting can used only with enclosure

Wiring diagrams:

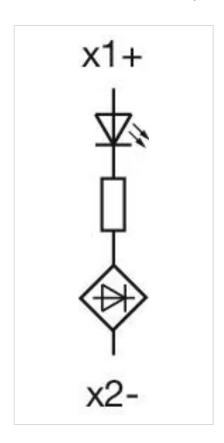

Dimension drawings:

