

Actuator

46-
2736.4920.000

Distribution by
Mouser



<https://mouser.eao.com/component/46-2736.4920...>

Your product:



46-2736.4920.000 Actuator

Loading ...

FRONT

| | |
|------------------------------|-----------|
| Front dimension: | Ø 40 mm |
| Front form: | Round |
| Front bezel colour: | Silver |
| Front bezel material: | Aluminium |

MOUNTING

| | |
|--------------------------|----------------|
| Design: | Flush |
| Mounting cut-out: | Ø 30.5 mm |
| Mounting type: | Panel mounting |

OPERATING-/INDICATION PART

| | |
|---------------------------|-----------------|
| Lens colour: | Red |
| Lens material: | Plastic |
| Lens illumination: | Non illuminated |
| Lens shape: | Mushroom-head |
| Lens optics: | opaque |

ELECTRICAL CHARACTERISTICS

| | |
|--------------------------|---|
| Protection class: | I |
|--------------------------|---|

MECHANICAL CHARACTERISTICS

| | |
|----------------------|-----------------|
| Release type: | Twist to unlock |
|----------------------|-----------------|

Mechanical lifetime: 50 000 cycles of operation
Tightening torque: 2 ... 3 Nm (17.7 ... 26.6 Lb-in)
Weight: 0.05 kg

AMBIENT CONDITION


IP front protection: IP65
IK front protection: IK03
Operating temperature: - 25 °C ... + 55 °C
Shock resistance: 30g, 18ms (EN-IEC 60068-2-27)
50g, 11ms (EN-IEC 60068-2-27)
Vibration resistance: 5g f= 2...500Hz (EN-IEC 60068-2-6)
Climate resistance: +25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30)

CERTIFICATE

Approbations: CSA, UL
Conformities: CE
REACH: REACH compliant
RoHS: RoHS compliant
Standards: CSA C22-2, IEC EN 60947-1, IEC EN 60947-5-1, IEC EN 60947-5-5, UL508, UNI EN ISO 12100, UNI EN ISO 13850

OTHER

Short Description: Actuator, Ø 30.5 mm, Ø 40 mm, Mushroom-head, Non illuminated, Red, Plastic, opaque, Round, Silver, Aluminium, IP65, IK03, Twist to unlock
Dimension: Ø 40 mm
Housing colour: Black
Housing material: Plastic
max. number of switching elements: 4
Mounting cut-outs:

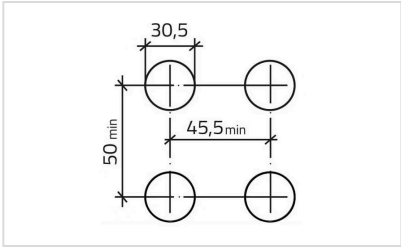

Dimension drawings:

