

Actuator

46-
2828.4CV0.001

Distribution by
Mouser



<https://mouser.eao.com/component/46-2828.4CV0...>

Your product:



46-2828.4CV0.001 Actuator

Loading ...

FRONT

Front dimension:	Ø 35 mm
Front form:	Round
Front bezel colour:	Silver
Front bezel material:	Aluminium

MOUNTING

Design:	Flush
Mounting cut-out:	Ø 30.5 mm
Mounting type:	Panel mounting

OPERATING-/INDICATION PART

Lever colour:	Black
Lever bar colour:	White
Lever material:	plastic
Lever shape:	short

ELECTRICAL CHARACTERISTICS

Protection class:	I
--------------------------	---

MECHANICAL CHARACTERISTICS

Switching action:	Maintained - Maintained
Switching positions:	2 positions

Switching angle: 90°
Mechanical lifetime: 1 Mil. cycles of operation
Tightening torque: 2 ... 3 Nm (17.7 ... 26.6 Lb-in)
Weight: 0.039 kg

AMBIENT CONDITION

IP front protection: IP65
IK front protection: IK04
Operating temperature: - 25 °C ... + 55 °C
Shock resistance: 30g, 18ms (EN-IEC 60068-2-27)
50g, 11ms (EN-IEC 60068-2-27)
Vibration resistance: 5g f= 2...500Hz (EN-IEC 60068-2-6)
Climate resistance: +25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30)

CERTIFICATE


Approbations: CSA, UL
Conformities: CE
REACH: REACH compliant
RoHS: RoHS compliant
Standards: CSA C22-2, IEC EN 60947-1, IEC EN 60947-5-1, UL508

OTHER

Short Description: Actuator, Ø 30.5 mm, Ø 35 mm, non illuminative, Black, short, Round, Silver, Aluminium, Maintained - Maintained, IP65, IK04
Housing colour: Black
Housing material: Plastic
max. number of switching elements: 6
Switching positions:



Mounting cut-outs:

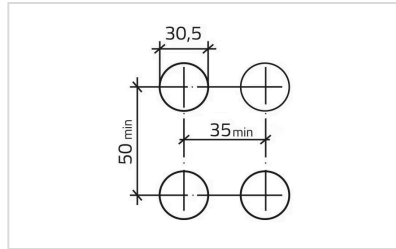

Dimension drawings:

