

e a o

Your Expert Partner for Human Machine Interfaces

## Actuator

61-0009.0

Distribution by  
Mouser



<https://mouser.eao.com/component/61-0009.0/en...>

Your product:

---



## 61-0009.0 Actuator

### MOUNTING

**Mounting type:** Panel mounting

### MECHANICAL CHARACTERISTICS

**Tightening torque:** Max. 0.5 Nm

**Weight:** 0.003 kg

### AMBIENT CONDITION

**IP Protection:** IP40 rear side, according to EN IEC 60529, IP67 front side, according to EN IEC 60529

**Operating temperature:** – 25 °C ... + 55 °C

**Storage temperature:** – 40 °C ... + 85 °C

### CERTIFICATE

**REACH:** REACH compliant

**RoHS:** RoHS compliant


### OTHER

**Short Description:** Actuator

**Housing material:** Plastic, according to UL 94 V0, self-extinguishing


**Wiring diagrams:**

X2+

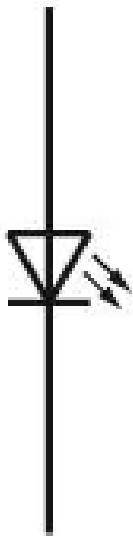


X1-

**Mounting cut-outs:**

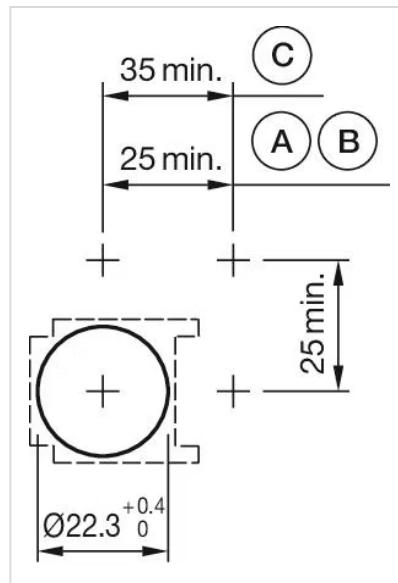


A = Solder/Plug-in terminal 2.8 mm x 0.5 mm  
B = Solder terminal  
C = Screw terminal

**Dimension drawings:**

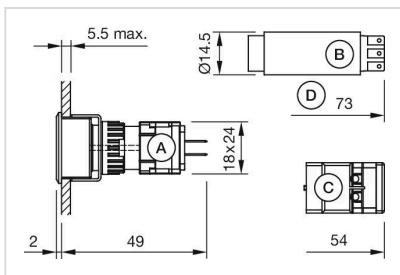

A = Plug-in terminal 2.8 mm x 0.5 mm  
B = Solder terminal  
C = Screw terminal  
D = Flasher

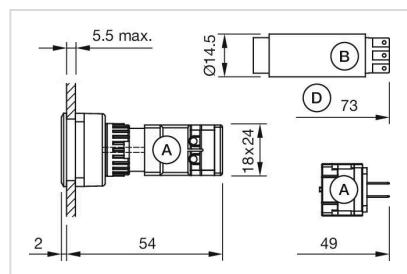

A = Plug-in terminal 2.8 mm x 0.5 mm  
B = Solder terminal  
C = Screw terminal  
D = Flasher