

Actuator

61-0009.0

Distribution by Mouser







Your product:



61-0009.0 Actuator

	\sim				
W	U	υſ	ТΝ	IN	G

Mounting type: Panel mounting

MECHANICAL CHARACTERISTICS

Tightening torque: Max. 0.5 Nm

Weight: 0.003 kg

AMBIENT CONDITION

IP Protection: IP40 rear side, according to EN IEC 60529, IP67 front side, according to EN IEC

60529

Operating temperature: $-25 \, ^{\circ}\text{C} \, ... + 55 \, ^{\circ}\text{C}$

Storage temperature: $-40 \, ^{\circ}\text{C} \dots + 85 \, ^{\circ}\text{C}$

CERTIFICATE

REACH: REACH compliant


RoHS: RoHS compliant

OTHER


Short Description: Actuator

Housing material: Plastic, according to UL 94 V0, self-extinguishing

Wiring diagrams:

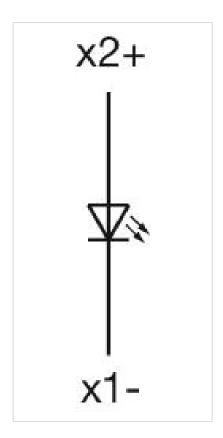


Mounting cut-outs:



A = Solder/Plug-in terminal 2.8 mm x 0.5

B = Solder terminal C = Screw terminal


Dimension drawings:



A = Plug-in terminal 2.8 mm x 0.5 mm B = Solder terminal

C = Screw terminal

D = Flasher



A = Plug-in terminal 2.8 mm x 0.5 mm B = Solder terminal

C = Screw terminal

D = Flasher