

Your Expert Partner for Human Machine Interfaces

Actuator

61-0009.0

Distribution by Mouser







https://mouser.eao.com/p/61-0009.0

Your product:



61-0009.0 Actuator

Mounting type:

Panel mounting

MECHANICAL CHARACTERISTICS

Tightening torque:	Max. 0.5 Nm
Weight:	0.005 kg

AMBIENT CONDITION


IP Protection:	IP40 rear side, according to EN IEC 60529, IP67 front side, according to EN IEC 60529
Operating temperature:	– 25 °C + 55 °C
Storage temperature:	– 40 °C + 85 °C

CERTIFICATE


REACH:	REACH compliant
RoHS:	RoHS compliant

OTHER

Short Description:	Actuator
Housing material:	Plastic, according to UL 94 V0, self-extinguishing
Wiring diagrams:	

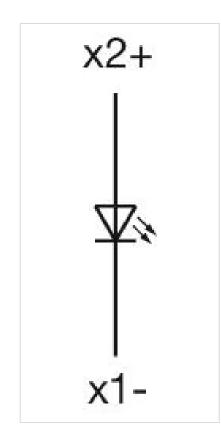


Mounting cut-outs:




A = Solder/Plug-in terminal 2.8 mm x 0.5 mm

B = Solder terminal C = Screw terminal

Dimension drawings:



- A = Plug-in terminal 2.8 mm x 0.5 mm B = Solder terminal



- A = Plug-in terminal 2.8 mm x 0.5 mm B = Solder terminal
- C = Screw terminal
- D = Flasher