


e a o 

Your Expert Partner for Human Machine Interfaces

Actuator

61-0039.0

Distribution by
Mouser

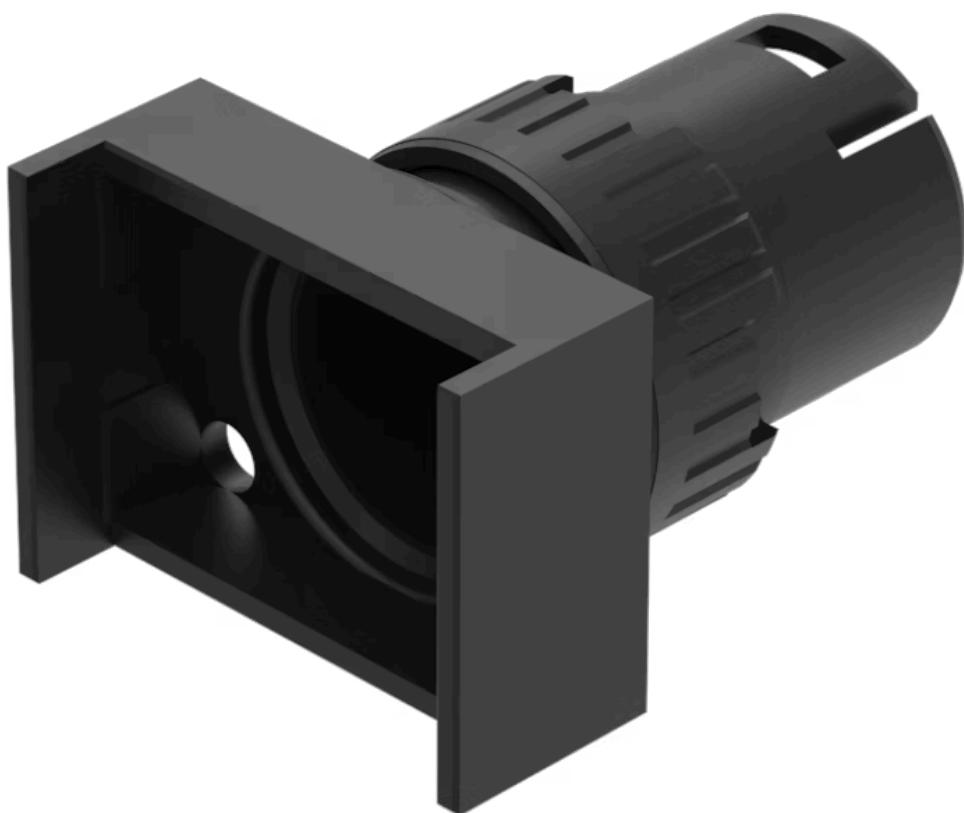

<https://mouser.eao.com/component/61-0039.0/en...>

Your product:



61-0039.0 Actuator

FRONT

Front dimension:	24 mm x 18 mm
Front form:	Rectangular
Front bezel colour:	Black
Front bezel material:	Plastic

MOUNTING

Mounting cut-out:	Ø 16 mm
Mounting type:	Panel mounting

MECHANICAL CHARACTERISTICS

Tightening torque:	Max. 0.5 Nm
Weight:	0.004 kg

AMBIENT CONDITION

IP Protection:	IP40 rear side, according to EN IEC 60529, IP67 front side, according to EN IEC 60529
Operating temperature:	- 25 °C ... + 55 °C
Storage temperature:	- 40 °C ... + 85 °C

CERTIFICATE

REACH:	REACH compliant
RoHS:	RoHS compliant

OTHER


Short Description: Actuator, Ø 16 mm, 24 mm x 18 mm, Rectangular, Black, Plastic

Internal size: 21,5 mm x 15,3 mm


Housing colour: Black

Housing material: Plastic, according to UL 94 V0, self-extinguishing

Wiring diagrams:

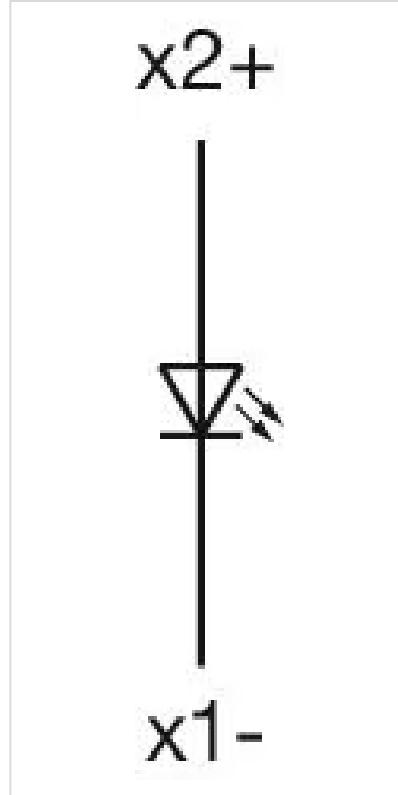

Mounting cut-outs:

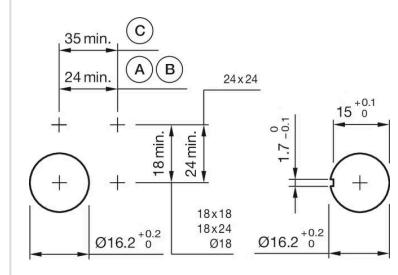


A = Solder/Plug-in terminal 2.8 mm x 0.5 mm

B = Solder terminal

C = Screw terminal

Dimension drawings:

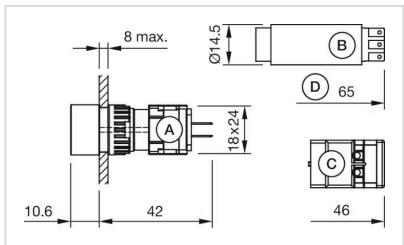

A = Plug-in terminal 2.8 mm x 0.5 mm
B = Solder terminal
C = Screw terminal
D = Flasher
E = Slow-make switching element
F = Snap-action switching element