

Actuator

61-0049.0

Distribution by Mouser







Your product:



61-0049.0 Actuator

MOUNTING

Mounting type: Panel mounting

MECHANICAL CHARATERISTIC

Tightening torque: Max. 0.5 Nm

Weight: 0.005 kg

AMBIENT CONDITION

IP40 rear side, according to EN IEC 60529, IP67 front side, according to EN IEC

60529

Operating temperature: - 25 °C ... + 55 °C

Storage temperature: $-40 \, ^{\circ}\text{C} \dots + 85 \, ^{\circ}\text{C}$

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant


OTHER

Short Description: Actuator


Housing colour: Black

Housing material: Plastic, according to UL 94 VO, self-extinguishing

Wiring diagrams:

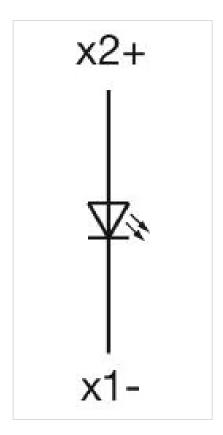

Mounting cut-outs:




A = Solder/Plug-in terminal 2.8 mm x 0.5 mm

B = Solder terminal

C = Screw terminal

Dimension drawings:



A = Plug-in terminal 2.8 mm x 0.5 mm

B = Solder terminal

C = Screw terminal

D = Flasher