

# Actuator

61-0049.0

Distribution by  
Mouser



<https://mouser.eao.com/component/61-0049.0/en...>

Your product:

---



## 61-0049.0 Actuator

*Loading ...*

### **MOUNTING**

**Mounting type:** Panel mounting

### **MECHANICAL CHARACTERISTICS**

**Tightening torque:** Max. 0.5 Nm

**Weight:** 0.004 kg

### **AMBIENT CONDITION**

**IP Protection:** IP40 rear side, according to EN IEC 60529, IP67 front side, according to EN IEC 60529

**Operating temperature:** – 25 °C ... + 55 °C

**Storage temperature:** – 40 °C ... + 85 °C

### **CERTIFICATE**

**REACH:** REACH compliant

**RoHS:** RoHS compliant


### **OTHER**

**Short Description:** Actuator


**Housing colour:** Black

**Housing material:** Plastic, according to UL 94 V0, self-extinguishing

**Wiring diagrams:**

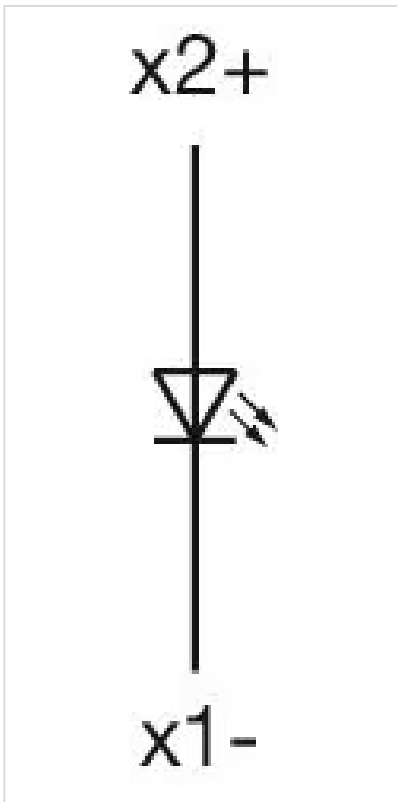


**Mounting cut-outs:**

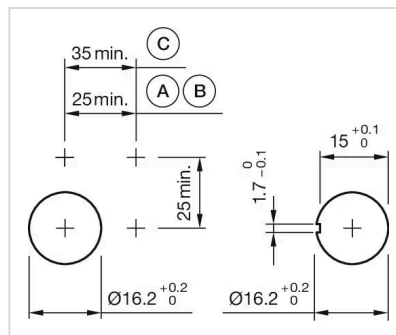

- A = Solder/Plug-in terminal 2.8 mm x 0.5 mm
- B = Solder terminal
- C = Screw terminal

**Dimension drawings:**

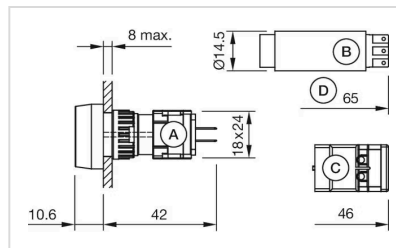

- A = Plug-in terminal 2.8 mm x 0.5 mm
- B = Solder terminal
- C = Screw terminal
- D = Flasher