


# Actuator

61-  
4970.10

Distribution by  
Mouser

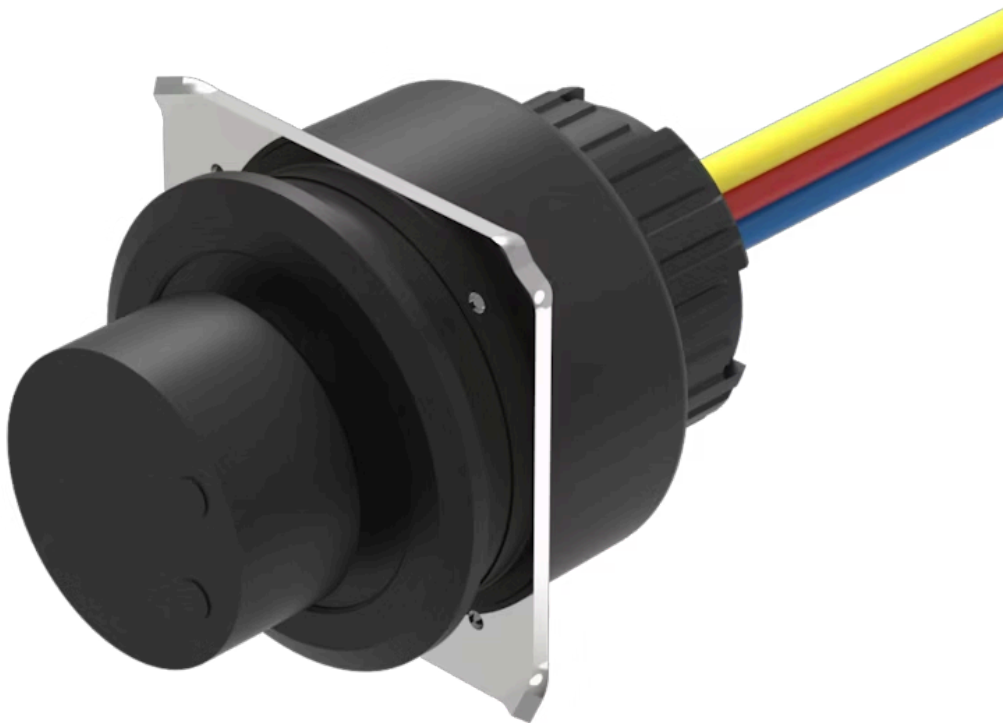

<https://mouser.eao.com/component/61-4970.10/e...>

Your product:

---



## 61-4970.10 Actuator

*Loading ...*

### FRONT

<b>Front dimension:</b>	Ø 25 mm
<b>Front form:</b>	Round
<b>Front bezel colour:</b>	Black
<b>Front bezel material:</b>	Plastic

### MOUNTING

<b>Mounting cut-out:</b>	Ø 22.3 mm
<b>Mounting type:</b>	Panel mounting

### ELECTRICAL CHARACTERISTICS

<b>Power (W):</b>	1
<b>Resistance:</b>	10 kΩ

### MECHANICAL CHARACTERISTICS

<b>Terminal:</b>	Flat ribbon cable
<b>Tightening torque:</b>	Max. 0.5 Nm
<b>Weight:</b>	0.019 kg

### AMBIENT CONDITION

<b>IP front protection:</b>	IP65
<b>Operating temperature:</b>	- 25 °C ... + 55 °C

## CERTIFICATE

**REACH:** REACH compliant

**RoHS:** RoHS compliant


## OTHER

**Short Description:** Actuator, Ø 22.3 mm, Ø 25 mm, Round, Black, Plastic, Flat ribbon cable, IP65

**Housing material:** Plastic


**Product attributes:** Cable length 300 mm

### Wiring diagrams:

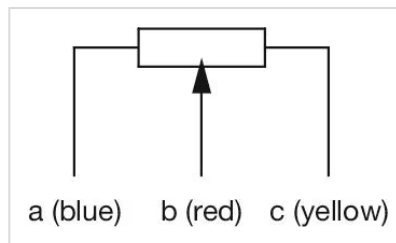


A = blue  
B = red  
C = yellow

### Component layouts:

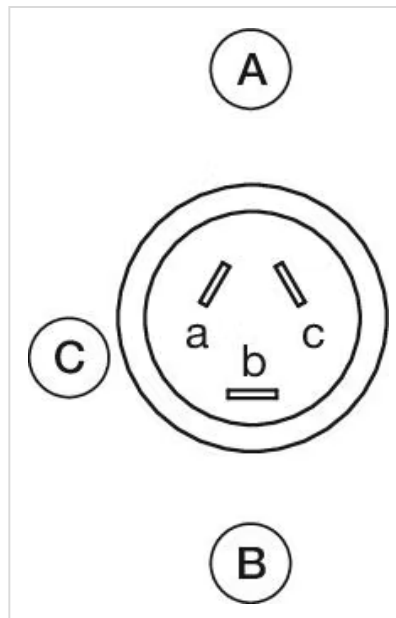

A = Terminals (rear side)  
B = Conductor colour of flat ribbon cable  
C = a = blue, b = red, c = yellow

### Mounting cut-outs:

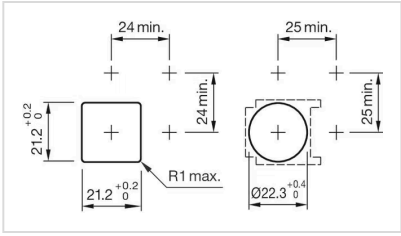

**Dimension drawings:**

