


# Switching element

70-220.4S

Distribution by  
Mouser

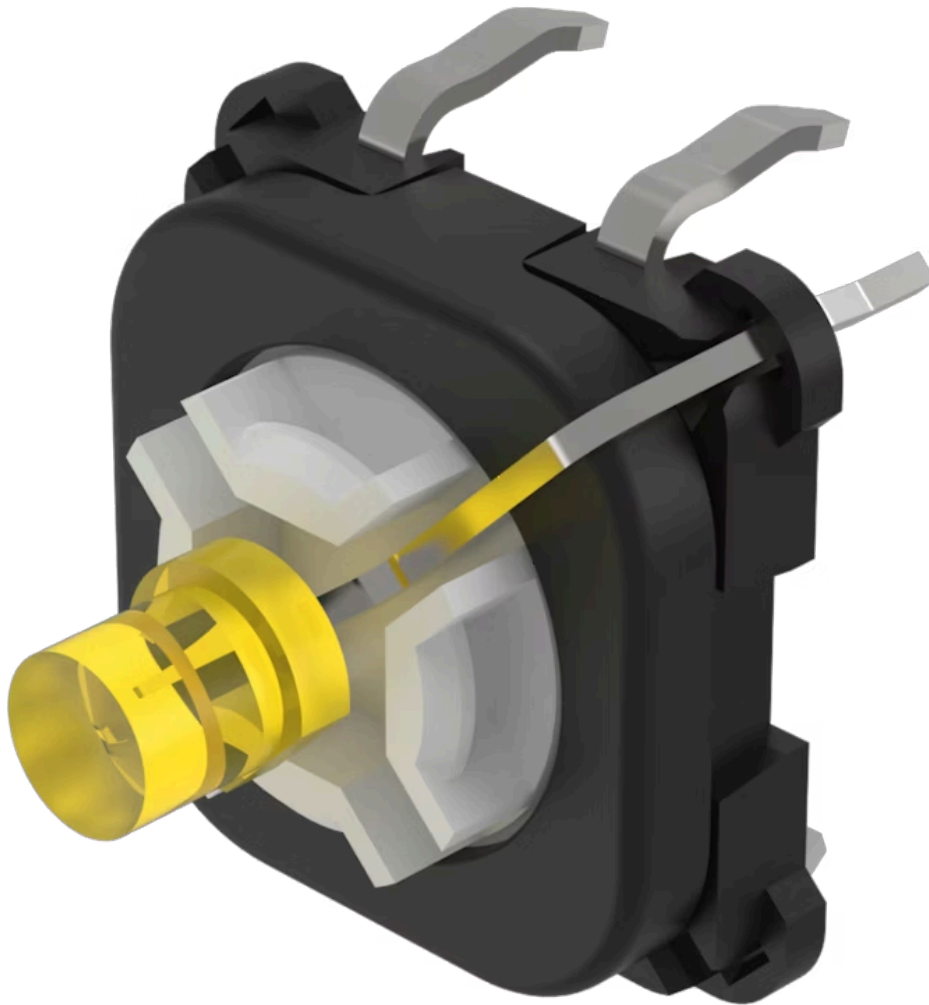

<https://mouser.eao.com/component/70-220.4S/en...>

Your product:

---



## 70-220.4S Switching element

*Loading ...*

### OPERATING-/INDICATION PART

**Illumination colour:** Yellow

### ELECTRICAL CHARACTERISTICS

**Contacts:** 1 NO  
**Switching rating:** 42 V DC @ 0,1 A  
**Lumi. Intensity:** 600 mcd

### MECHANICAL CHARACTERISTICS

**Terminal:** PCB terminal  
**Contact material:** Gold  
**Switching action:** Momentary  
**Switching system:** Short-travel element  
**Weight:** 0.001 kg

### CERTIFICATE

**REACH:** REACH compliant  
**RoHS:** RoHS compliant

### OTHER

**Short Description:** Switching element, Short-travel element, 42 V DC @ 0,1 A, Gold, 1 NO, PCB terminal

**Hints:** The customer has to decide what series resistor shall be used to the LED

**Wiring diagrams:**

