

e a o

Your Expert Partner for Human Machine Interfaces

Actuator

704.002.7

Distribution by
Mouser



<https://mouser.eao.com/component/704.002.7/en...>

Your product:



704.002.7
Actuator

FRONT

Front dimension:	Ø 29 mm
Front form:	Round
Front bezel colour:	Grey
Front bezel material:	Plastic

MOUNTING

Design:	Raised
Mounting type:	Panel mounting

OPERATING-/INDICATION PART

Lens colour:	Colourless
Lens material:	Plastic
Lens shape:	Flush
Lens optics:	transparent
Marking plate colour:	White
Marking plate optics:	translucent
Marking plate illumination:	illuminative

ELECTRICAL CHARACTERISTICS

Standards:	The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1
-------------------	---

MECHANICAL CHARACTERISTICS

Terminal:	Screw terminal
Weight:	0.032 kg

AMBIENT CONDITION

IP Protection:	IP65 front side
Operating temperature:	– 40 °C ... + 55 °C
Storage temperature:	– 40 °C ... + 85 °C


CERTIFICATE

REACH:	REACH compliant
RoHS:	RoHS compliant

OTHER



Short Description:	Actuator, Ø 29 mm, Flush, Colourless, Plastic, transparent, Round, Grey, Plastic, Screw terminal
Housing colour:	Grey
Housing material:	Plastic
Hints:	Filament lamp or LED
Wiring diagrams:	

X2+

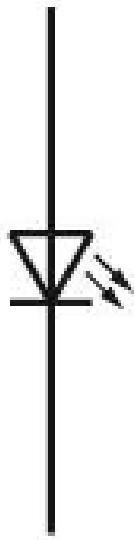

X1-



Mounting cut-outs:

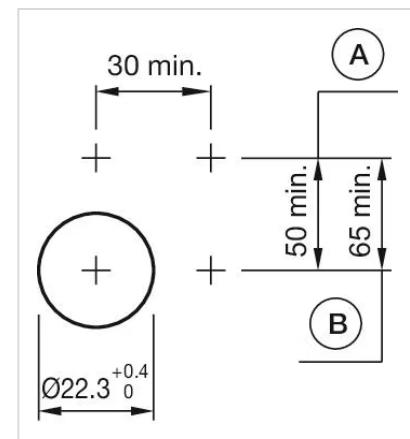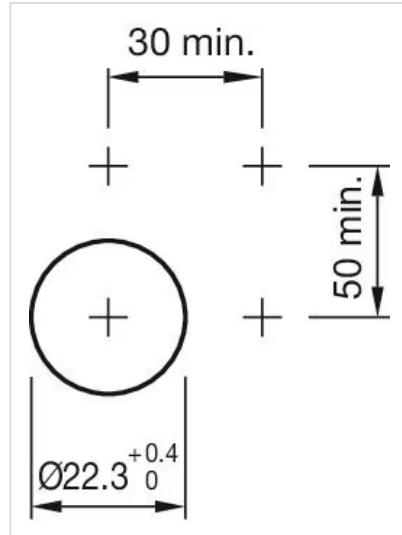

A = Screw terminal

B = Push-in terminal (PIT)

Dimension drawings:

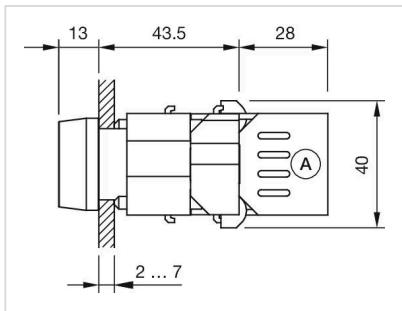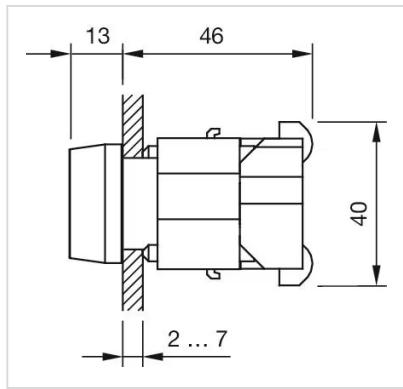

A = Screw terminal