

# Actuator

704.006.5

Distribution by Mouser









## 704.006.5 Actuator

Front dimension: Ø 29 mm

Front form: Round

Front bezel colour: Black

Front bezel material: Plastic

#### **MOUNTING**

Design: Raised

Mounting type: Panel mounting

### **OPERATING-/INDICATION PART**

Lens colour: Green

Lens material: Plastic

Lens shape: Flush

Lens optics: transparent

Marking plate colour: White

Marking plate optics: translucent


Marking plate illumination: illuminative

## **ELECTRICAL CHARACTERISTICS**


**Standards:** The switches comply with the "Standards for low-voltage switching devices" DIN


EN 60947-1

Terminal:	Screw terminal
Weight:	0.037 kg
·	
AMPIENT CONDITION	
AMBIENT CONDITION	
IP Protection:	IP65 front side
Operating temperature:	– 40 °C + 55 °C
Storage temperature:	– 40 °C + 85 °C
CERTIFICATE	
REACH:	REACH compliant
RoHS:	RoHS compliant
OTHER	
Short Description:	Actuator, Ø 29 mm, Flush, Green, Plastic, transparent, Round, Black, Plastic,
onor Bosonption.	Screw terminal
Housing colour:	Grey
Housing material:	Plastic
Hints:	Filament lamp or LED
Wiring diagrams:	

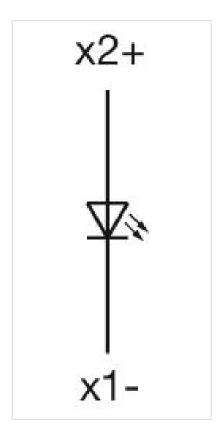


## Mounting cut-outs:





A = Screw terminal B = Push-in terminal (PIT)

## Dimension drawings:



A = Screw terminal

