

# Actuator

704.006.7

Distribution by Mouser









## 704.006.7 Actuator

Round

F	R	0	N	т
		$\overline{}$		

Front dimension: Ø 29 mm

Front bezel colour: Black

Front bezel material: Plastic

#### **MOUNTING**

Front form:

Design: Raised

Mounting type: Panel mounting

#### **OPERATING-/INDICATION PART**

Lens colour: Colourless

Lens material: Plastic

Lens shape: Flush

Lens optics: transparent

Marking plate colour: White

Marking plate optics: translucent


Marking plate illumination: illuminative

## **ELECTRICAL CHARACTERISTICS**


Standards: The switches comply with the "Standards for low-voltage switching devices" DIN

EN 60947-1


Terminal:	Screw terminal	
Weight:	0.05 kg	
AMBIENT CONDITION		
IP Protection:	IP65 front side	
Operating temperature:	– 40 °C + 55 °C	
Storage temperature:	– 40 °C + 85 °C	
CERTIFICATE		
REACH:	REACH compliant	
RoHS:	RoHS compliant	
OTHER		
Short Description:	Actuator, $\emptyset$ 29 mm, Flush, Colourless, Plastic, transparent, Round, Black, Plastic, Screw terminal	
Housing colour:	Grey	
Housing material:	Plastic	
Hints:	Filament lamp or LED	
Wiring diagrams:		

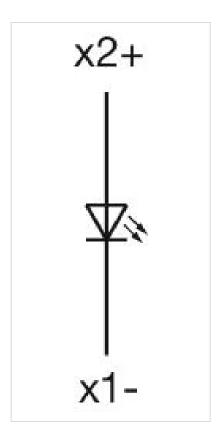


### Mounting cut-outs:




A = Screw terminal B = Push-in terminal (PIT)



### Dimension drawings:





A = Screw terminal