


Actuator

704.064.2A

Distribution by
Mouser<https://mouser.eao.com/component/704.064.2A/e...>

Your product:

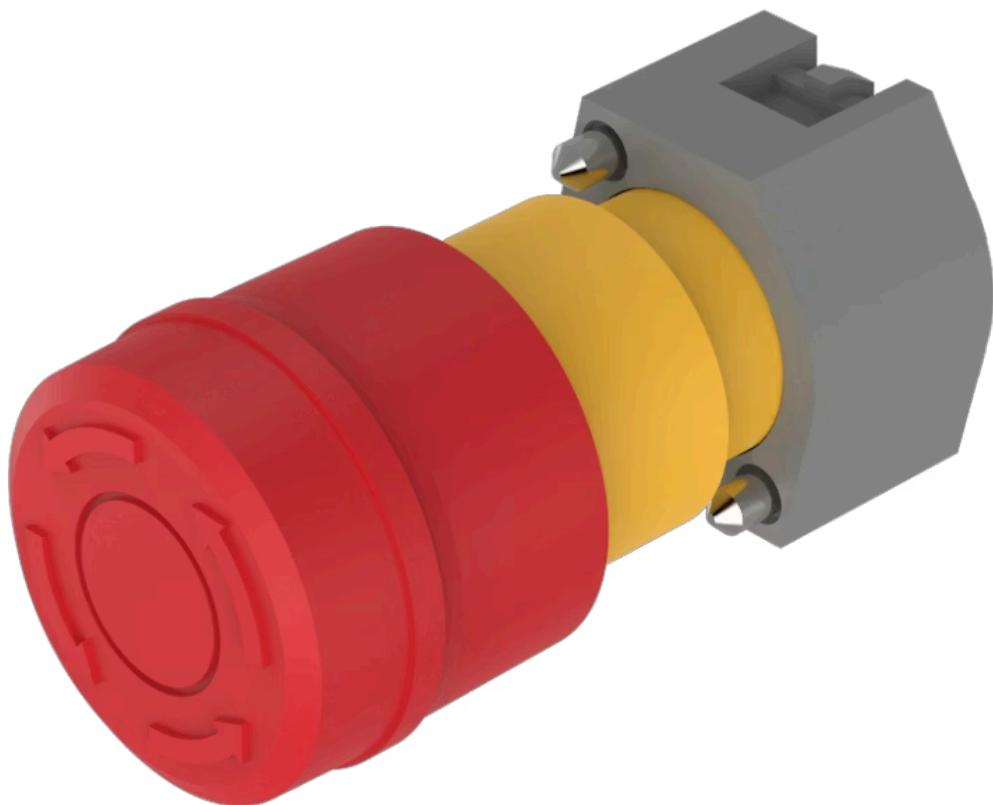

704.064.2A Actuator

FRONT

Front dimension: Ø 37 mm

Front form: Round

MOUNTING

Design: Raised

Mounting type: Panel mounting

OPERATING-/INDICATION PART

Lens colour: Red

Lens material: Plastic

Lens illumination: Non illuminated

Lens shape: Mushroom-head

Lens optics: opaque

MECHANICAL CHARACTERISTICS

Switching action: Maintained

Release type: Twist to unlock

Mechanical lifetime: ≥50 000 cycles of operation

Operating force: 8 N

Operating Travel: ca. 5.8 mm ± 0.2 mm

Weight: 0.048 kg


AMBIENT CONDITION

IP Protection:	IP65 front side
Operating temperature:	– 25 °C ... + 55 °C
Storage temperature:	– 40 °C ... + 85 °C


CERTIFICATE

REACH:	REACH compliant
RoHS:	RoHS compliant

OTHER

Short Description:	Actuator, Ø 37 mm, Mushroom-head, Non illuminated, Red, Plastic, opaque, Round, Maintained, Twist to unlock
Housing colour:	Yellow
Housing material:	Plastic
Marking:	Arrows
Product attributes:	Twist to unlock anti-clockwise
Hints:	Shaft yellow
Wiring diagrams:	

Mounting cut-outs:

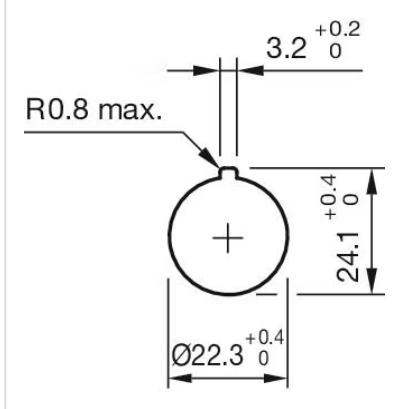

Dimension drawings:

A = Screw terminal

