


Actuator

704.064.2A

Distribution by
Mouser

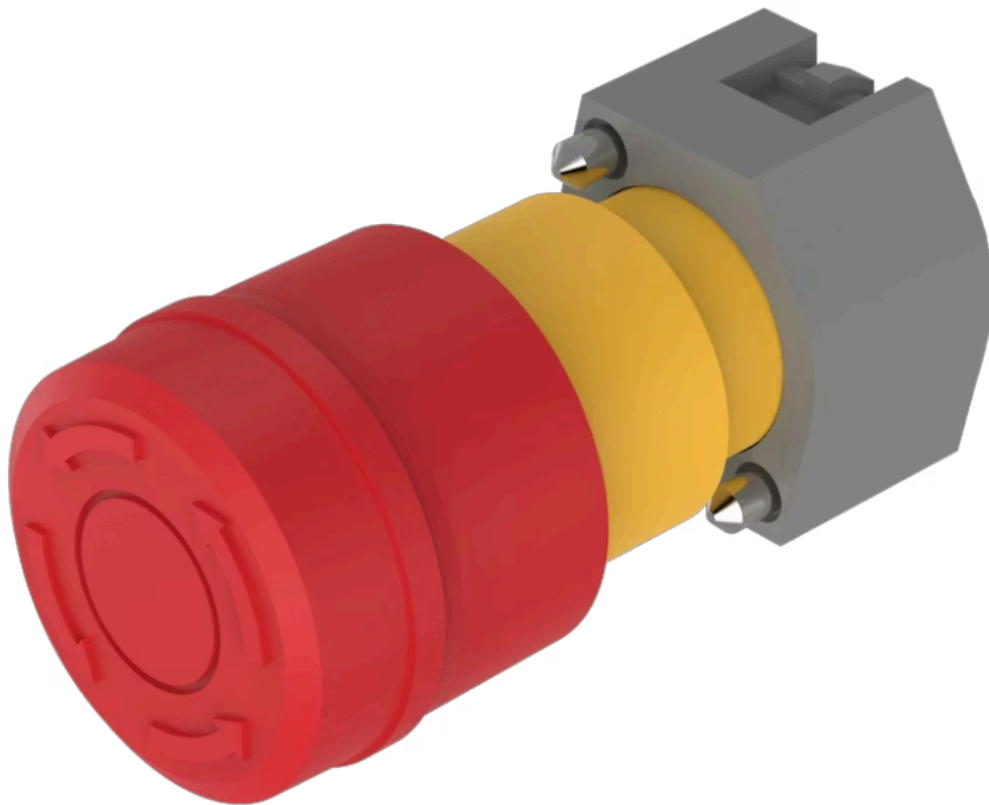

<https://mouser.eao.com/component/704.064.2A/e...>

Your product:



704.064.2A Actuator

Loading . . .

FRONT

Front dimension: Ø 37 mm

Front form: Round

MOUNTING

Design: Raised

Mounting type: Panel mounting

OPERATING-/INDICATION PART

Lens colour: Red

Lens material: Plastic

Lens illumination: Non illuminated

Lens shape: Mushroom-head

Lens optics: opaque

MECHANICAL CHARACTERISTICS

Switching action: Maintained

Release type: Twist to unlock

Mechanical lifetime: ≥50 000 cycles of operation

Operating force: 8 N

Operating Travel: ca. 5.8 mm ± 0.2 mm

Weight: 0.048 kg

AMBIENT CONDITION

| | |
|-------------------------------|---------------------|
| IP Protection: | IP65 front side |
| Operating temperature: | - 25 °C ... + 55 °C |
| Storage temperature: | - 40 °C ... + 85 °C |

CERTIFICATE

| | |
|---------------|-----------------|
| REACH: | REACH compliant |
| RoHS: | RoHS compliant |


OTHER

| | |
|----------------------------|---|
| Short Description: | Actuator, Ø 37 mm, Mushroom-head, Non illuminated, Red, Plastic, opaque, Round, Maintained, Twist to unlock |
| Housing colour: | Yellow |
| Housing material: | Plastic |
| Marking: | Arrows |
| Product attributes: | Twist to unlock anti-clockwise |
| Hints: | Shaft yellow |


Wiring diagrams:



Mounting cut-outs:

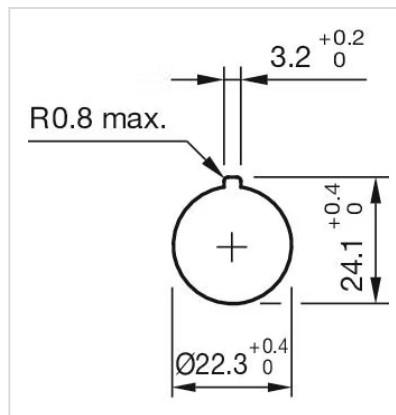

Dimension drawings:

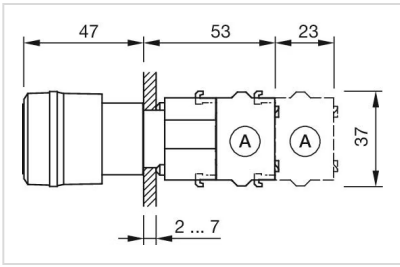

A = Screw terminal