


# Actuator

704.066.2

Distribution by  
Mouser

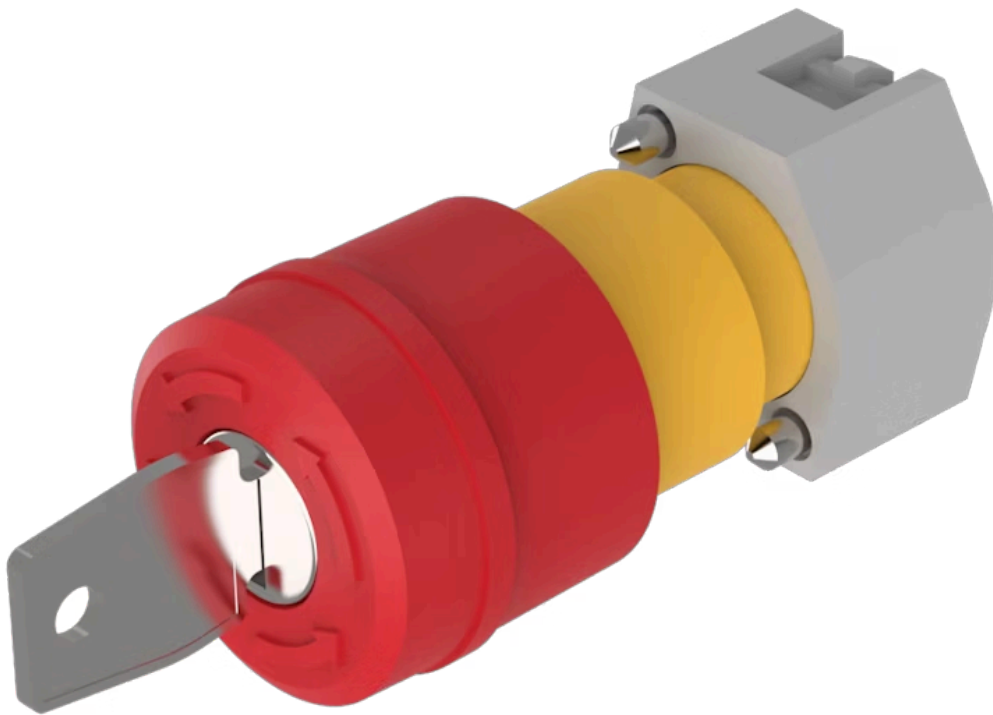

<https://mouser.eao.com/p/704.066.2>

Your product:

---



## 704.066.2 Actuator

### FRONT

**Front dimension:** Ø 37 mm

**Front form:** Round

### MOUNTING

**Design:** Raised

**Mounting type:** Panel mounting

### OPERATING-/INDICATION PART

**Lens colour:** Red

**Lens material:** Plastic

**Lens illumination:** Non illuminated

**Lens shape:** Mushroom-head

**Lens optics:** opaque

### ELECTRICAL CHARACTERISTICS

**Switching rating:**

**Standards:** The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1

### MECHANICAL CHARACTERISTIC

**Switching action:** Maintained

**Release type:** Key release to unlock

**Mechanical lifetime:** ≤50 000 cycles of operation

<b>Operating force:</b>	8 N
<b>Operating Travel:</b>	ca. 5.8 mm ± 0.2 mm
<b>Weight:</b>	0.3 kg


## AMBIENT CONDITION

<b>IP Protection:</b>	IP65 front side
<b>Operating temperature:</b>	– 40 °C ... + 55 °C
<b>Storage temperature:</b>	– 40 °C ... + 85 °C


## CERTIFICATE

<b>REACH:</b>	REACH compliant
<b>RoHS:</b>	RoHS compliant


## OTHER
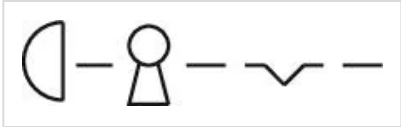
<b>Short Description:</b>	Actuator, Ø 37 mm, Mushroom-head, Non illuminated, Red, Plastic, opaque, Round, Maintained, Key release to unlock
<b>Housing colour:</b>	Yellow
<b>Housing material:</b>	Plastic
<b>Marking:</b>	Arrows
<b>Product attributes:</b>	Key to unlock clockwise
<b>Hints:</b>	Shaft yellow
<b>max. number of switching elements:</b>	2
<b>Wiring diagrams:</b>	

**Mounting cut-outs:**

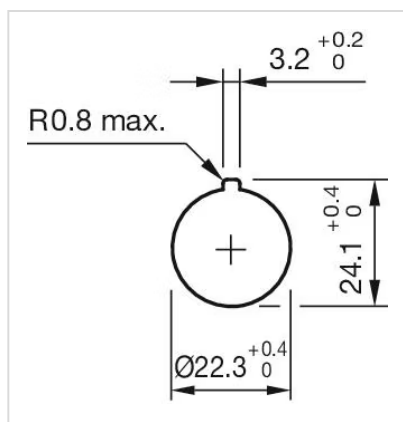

**Dimension drawings:**

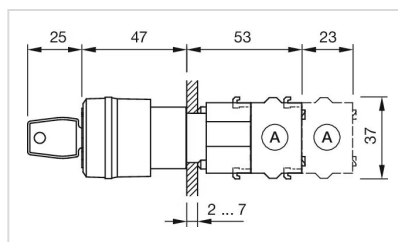

A = Screw terminal