


e a o 

Your Expert Partner for Human Machine Interfaces

## Actuator

704.118.0

Distribution by  
Mouser

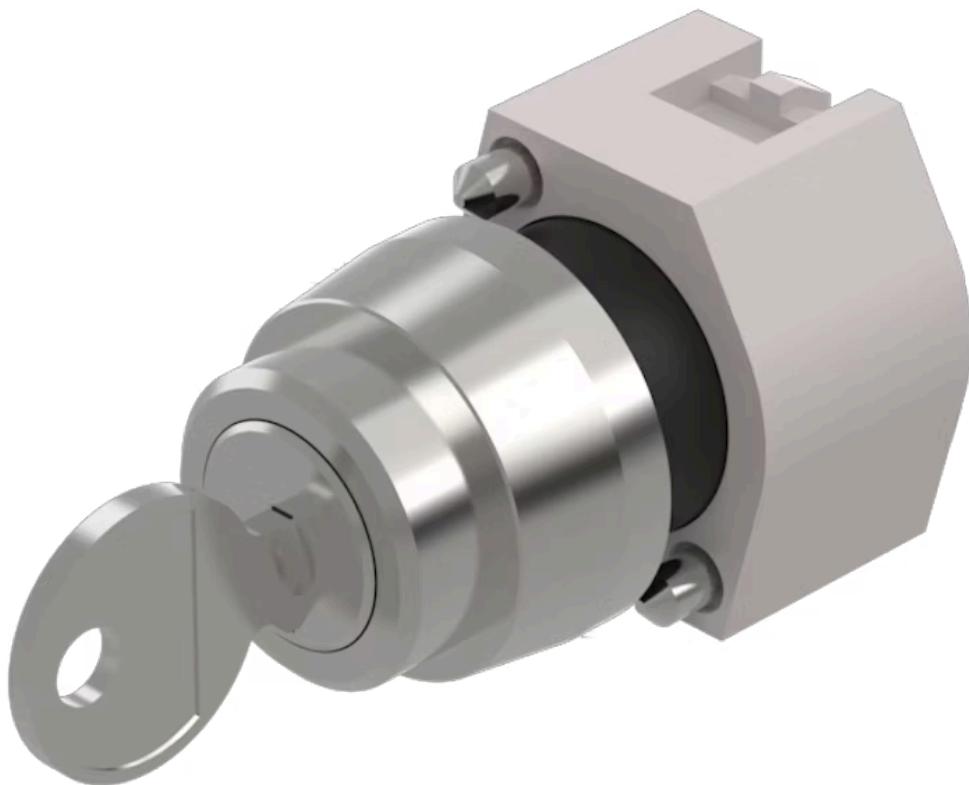

<https://mouser.eao.com/component/704.118.0/en...>

Your product:

---



## 704.118.0 Actuator

### FRONT

<b>Front dimension:</b>	Ø 29 mm
<b>Front form:</b>	Round
<b>Front bezel colour:</b>	Nature
<b>Front bezel material:</b>	Aluminium

### MOUNTING

<b>Design:</b>	Raised
<b>Mounting type:</b>	Panel mounting

### ELECTRICAL CHARACTERISTICS

<b>Standards:</b>	The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1
-------------------	---

### MECHANICAL CHARACTERISTICS

<b>Switching action:</b>	Momentary - Rest (a) - Maintained
<b>Switching positions:</b>	3 positions
<b>Switching angle:</b>	42° left / 42° right
<b>Mechanical lifetime:</b>	≤50 000 cycles of operation
<b>Weight:</b>	0.07 kg

### AMBIENT CONDITION

<b>IP Protection:</b>	IP65 front side
<b>Operating temperature:</b>	- 40 °C ... + 55 °C

**Storage temperature:**

– 40 °C ... + 85 °C

## CERTIFICATE

**REACH:**

REACH compliant

**RoHS:**

RoHS compliant

## OTHER

**Short Description:**

Actuator, Ø 29 mm, Round, Nature, Aluminium, Momentary - Rest (a) - Maintained

**Hints:**

The standard lock Ronis 251


Further lock numbers on request

Max. 3 switching elements can be clipped on

**max. number of switching elements:**

3


**Switching positions:**

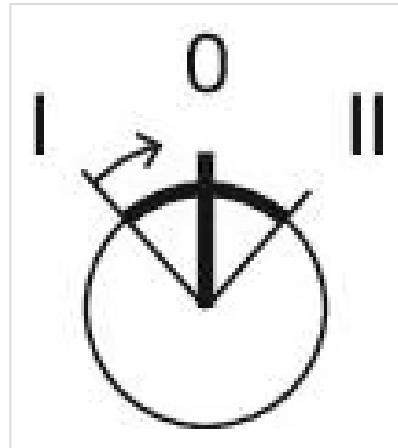

**Wiring diagrams:**



**Mounting cut-outs:**

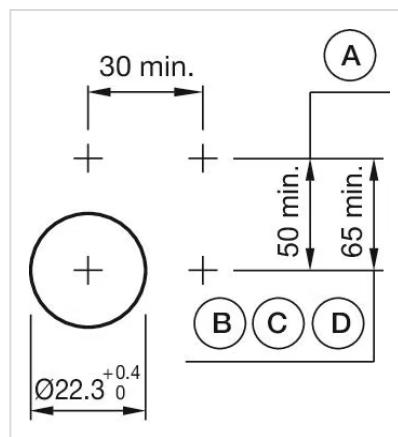


A = Screw terminal

B = Push-in terminal (PIT)

C = Plug-in terminal 6.3 mm x 0.8 mm

D = Double plug-in terminal 6.3 mm x 0.8 mm

**Dimension drawings:**

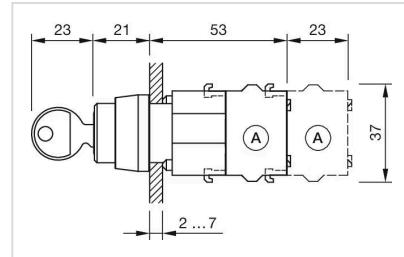

A = Screw terminal